



WAAS CH 70405 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev	6499 813 813
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

FINDLAY (FDY)

RNP APCH-GPS.		MISSED APPROACH: Climb to 2600 direct KASPE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Baro-VNAV and VDP NA when using Lima Allen County altimeter setting. When local altimeter setting not received, use Lima Allen County altimeter setting: increase all DAs/MDAs 80 feet; increase LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Circling Rwy 7 NA at night.		

ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.725 (CTAF) 0
-----------------------	---------------------------------------	-----------------------------------

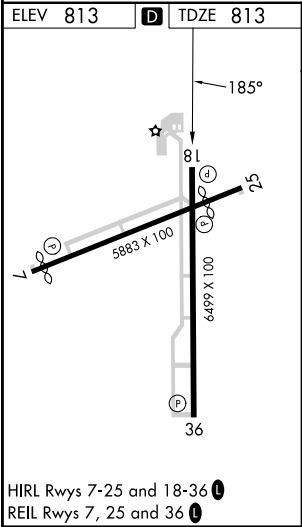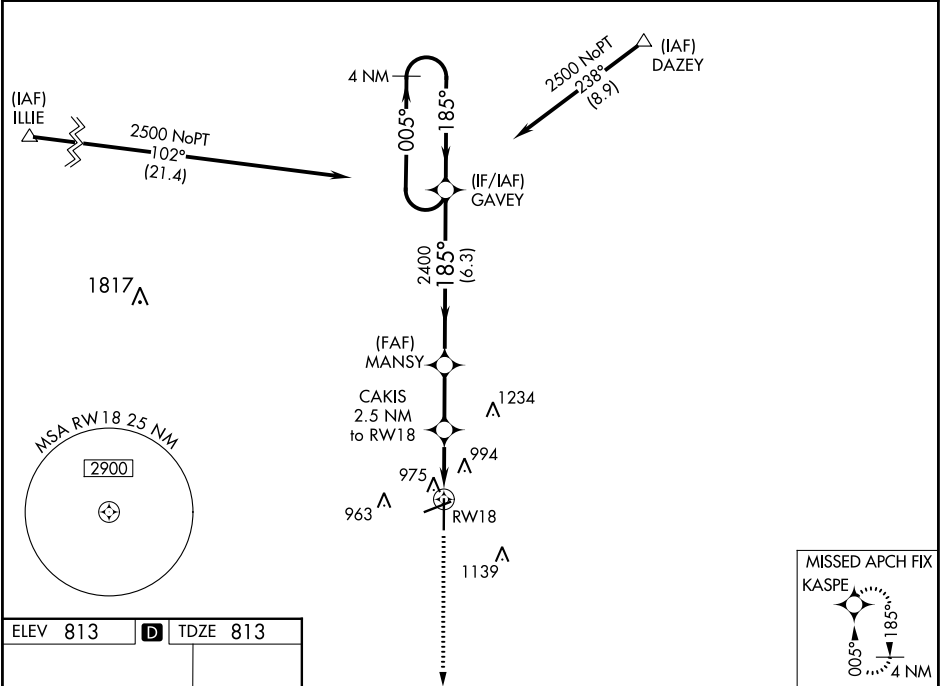

2600 KASPE		GAVEY 4 NM Holding Pattern	
*LNAV only		2500	
CAKIS 2.5 NM to RW18		MANSY 2400	
*1.4 NM to RW18		2400	
RW18		GP 3.00° TCH 43	
1.4 NM		6.3 NM	
CATEGORY		A B C D	
LPV DA		1063-1 250 (300-1)	
LNAV/VNAV DA		1320-1¾ 507 (600-1¾)	
LNAV MDA		1300-1 487 (500-1) 1300-1¾ 487 (500-1¾) 1300-1½ 487 (500-1½)	
CIRCLING		1440-1 627 (700-1) 1440-1¾ 627 (700-1¾) 1540-2¼ 727 (800-2¼)	