

WAAS
CH **42921**
W24A

APP CRS
241°

Rwy Idg
TDZE **1190**
Apt Elev **1190**

RNAV (GPS) RWY 24

HICKORY RGNL (HKY)

RNP APCH-GPS

▼

▲


Baro-VNAV NA when using Morganton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C. When local altimeter setting not received, use Morganton altimeter setting and increase all DA 39 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ½ mile. Circling Rwy 1, 6, 19 NA at night. VDP NA with Morganton altimeter setting. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.

MALSR

AS

MISSED APPROACH:
Climb to 2000 then climbing right turn to 5400 direct ZUGAT and hold, continue climb-in-hold to 5400.

ASOS 118.325	ATLANTA CENTER 125.15 263.0	HICKORY TOWER ★ 128.15 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7	CLNC DEL 124.25 (When twr closed)
------------------------	---------------------------------------	---	-------------------------	--------------------------	--

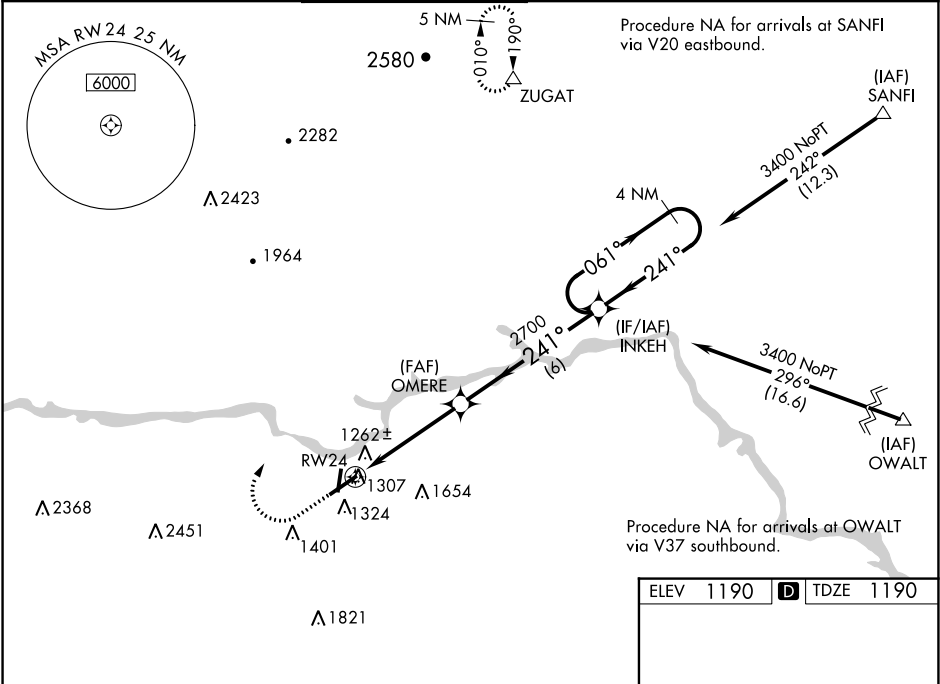

2000

5400

ZUGAT

*LNAV only.

*1.1 NM to RWY 24

RWY 24

OMERE

INKEH

4 NM Holding Pattern

GP 3.00° TCH 53

CATEGORY	A	B	C	D
LPV DA	1390-½	200 (200-½)		
LNAV/VNAV DA	1468-½	278 (300-½)		
LNAV MDA	1580-½ 390 (400-½)	1580-⅝ 390 (400-⅝)		
CIRCLING	1640-1 450 (500-1)	1660-1 470 (500-1)	2020-2½ 830 (900-2½)	2040-2¾ 850 (900-2¾)

ELEV 1190

TDZE 1190

61

241°

4400 X 150

0.6% UP

1251

6401 X 150

1223

0.8% UP

HIRL Rwy 6-24

MIRL Rwy 1-19

REIL Rwy 1

REIL Rws 6 and 19