

LOC I-OSH	APP CRS	Rwy Idg	8002
110.5	004°	TDZE	808
		Apt Elev	808

ILS or LOC RWY 36

WITTMAN RGNL (OSH)

⚠

When local altimeter setting not received, use Fond Du Lac altimeter setting and increase DA 31 feet and all MDA 40 feet; increase S-LOC 36 Cat C/D and Circling Cat C/D visibilities ¼ mile. For inop MALS when using Fond Du Lac altimeter setting, increase S-LOC 36 Cat C/D visibility to 1½ mile. Circling to Rwy 5, 23, and 31 NA at night.
* RVR 1800 authorized with the use of FD or AP or HUD to DA, NA when using Fond Du Lac altimeter setting.


MALS

AS

MISSED APPROACH:

Climb to 1300 then climbing right turn to 3000 on OSH R-111 to LEWKO INT/OSH 15 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) 290.9	132.3	122.95

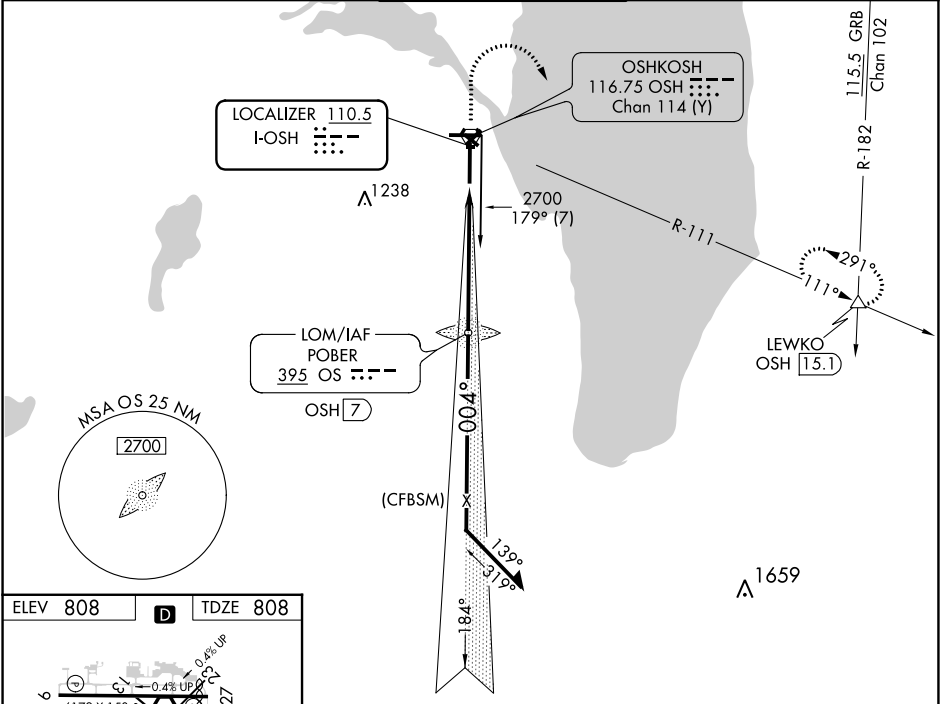

ELEV 808

D

TDZE 808

REIL Rwy 18 and 27

HIRL Rwy 9-27 and 18-36

FAF to MAP 5.4 NM

Knots 60 90 120 150 180

Min:Sec 5:24 3:36 2:42 2:10 1:48

1300	3000	LEWKO	OS LOM OSH 2610	Remain within 10 NM
↑	OSH R-111	△	2700	GS 3.00° TCH 53
5.4 NM				
CATEGORY	A	B	C	D
S-ILS 36 *	1008/24 200 (200-½)			
S-LOC 36	1340/24 532 (600-½)		1340/55 532 (600-1)	
CIRCLING	1340-1 532 (600-1)		1360-1½ 552 (600-1½)	
			1440-2 632 (700-2)	

EC-3, 30 NOV 2023 to 28 DEC 2023

EC-3, 30 NOV 2023 to 28 DEC 2023