


VORTAC OSH 116.75 Chan 114 (Y)	APP CRS 360°	Rwy Idg 8002 TDZE 808 Apt Elev 808
--	------------------------	---


VOR RWY 36
WITTMAN RGNL (OSH)

Circling to Rwy 5, 23, and 31 NA at night. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet; increase S-36 Cats C/D visibility and, Circling Cat C visibility 1/8 mile, increase Circling Cat D visibility 1/4 mile, LAUDE fix minimums increase S-36 Cats C/D visibility to RVR 5500 and Circling Cat D visibility to 2 1/4 mile. For inop MALSR, when using Fond Du Lac altimeter setting, increase LAUDE fix minimums S-36 Cats C/D visibility to 1 3/8 mile. VDP NA with Fond Du Lac altimeter setting.	MALSR	MISSED APPROACH: Climbing right turn to 3000 on OSH VORTAC R-111 to LEWKO INT/ OSH 15.1 DME and hold.
---	--	--

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 290.9	GND CON 132.3	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

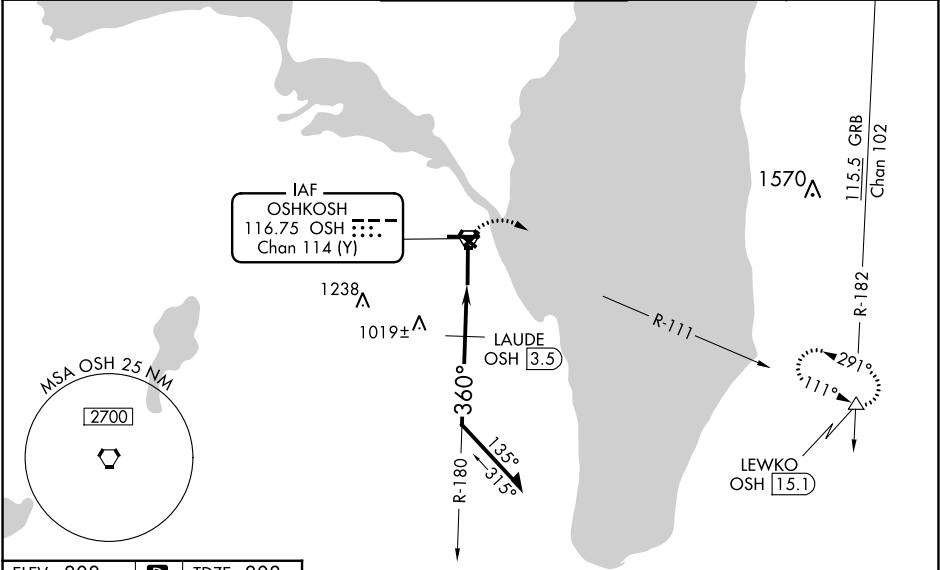

ELEV 808	D	TDZE 808
-----------------	----------	-----------------

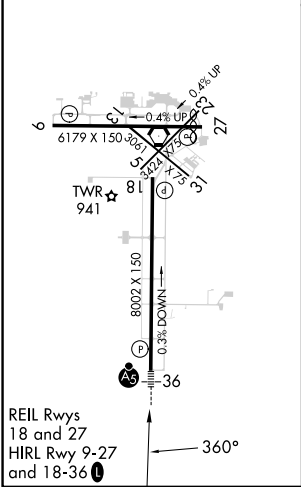

3000	LEWKO	OSHKOSH VORTAC	6000	180°	2300	360°	1460
OSHKOSH R-111				LAUDE OSH 3.5			
*1500 when using Fond Du Lac altimeter setting.							
*1460							
TCH 52							
1.3 NM 0.6 NM							
CATEGORY	A	B	C	D			
S-36	1460/24	652 (700-1/2)	1460-1 3/8	652 (700-1 3/8)			
CIRCLING	1460-1	652 (700-1)	1460-1 7/8	652 (700-1 7/8)	1460-2	652 (700-2)	
LAUDE FIX MINIMUMS							
S-36	1280/24	472 (500-1/2)	1280/50	472 (500-1)			
CIRCLING	1280-1	472 (500-1)	1300-1	492 (500-1)	1360-1 1/2	552 (600-1 1/2)	1440-2
					632 (700-2)		