


MOLOKAI FIVE DEPARTURE

RADAR and DME required

TOP ALTITUDE:
ASSIGNED BY ATC

TAKEOFF MINIMUMS
Rwys 26L/R: Standard.
Rwys 4L/R: Standard with minimum climb of 425' per NM to 1900, do not exceed 180K until established on assigned heading.
Rwy 8L: Standard with minimum climb of 313' per NM to 1400.
Rwy 8R: Standard with minimum climb of 296' per NM to 500.

HCF APPROACH
124.8 317.6
D-ATIS
127.9 251.15
CLNC DEL
121.4 281.4
GND CON
121.9 348.6
HONOLULU TOWER
118.1 257.8
123.9 273.575 (Rwy 8R/26L)

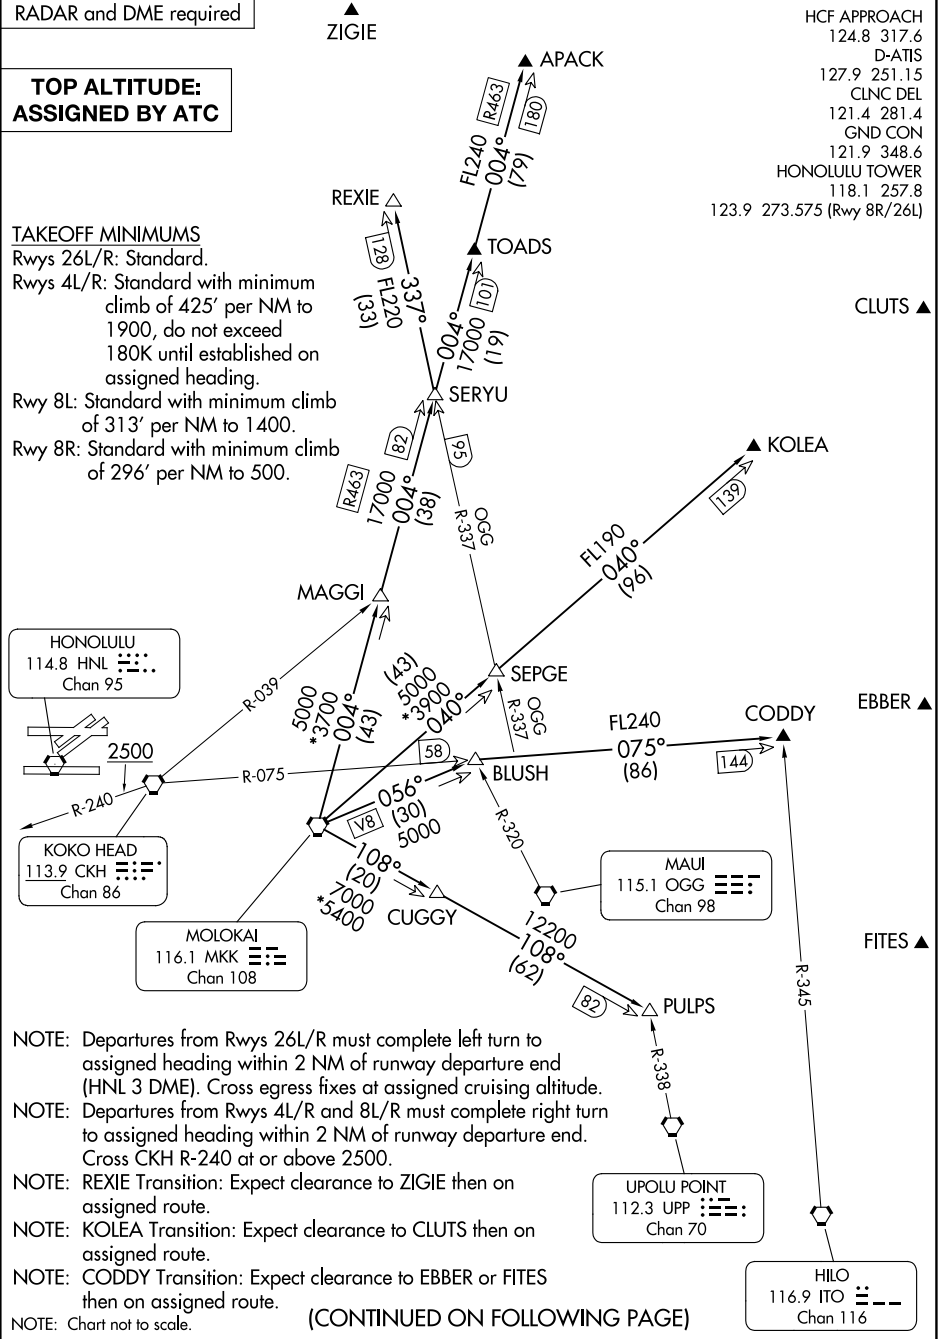

MOLOKAI FIVE DEPARTURE