


APP CRS 259°	Rwy Idg 12000 TDZE 10 Apt Elev 13
------------------------	--

RNAV (RNP) RWY 26L
DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH, RF required.		 For uncompensated Baro-VNAV systems, procedure NA below 15°C (58°F) or above 53°C (128°F).  NA		 MALSF	MISSED APPROACH: Climb to 3000 on track 259° to KABTE, left turn to LAYIG, then track 133° to ALANA and hold. Missed approach requires minimum climb of 234 feet per NM to 300.
D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (Rwy 8R/26L)		GND CON 121.9 348.6	CLNC DEL 121.4 281.4

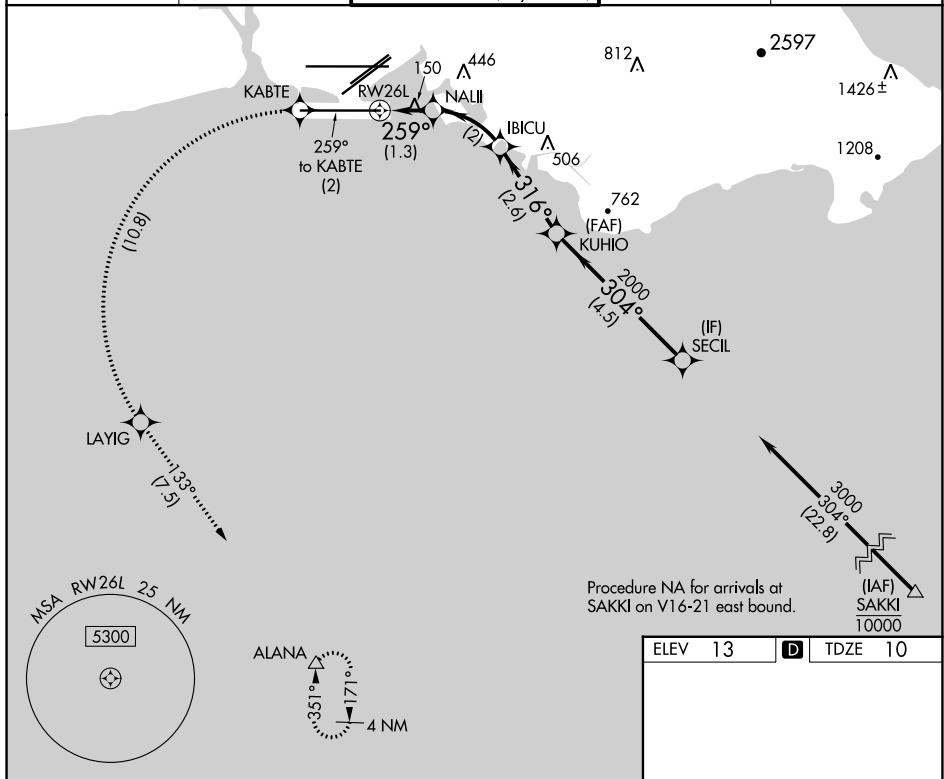

3000 ↑ tr 259°	KABTE ✦	LAYIG ✦	tr 133° △	ALANA △	KUHIO	SECIL
CATEGORY	A		B		C	D
RNP 0.15 DA			260-3/4		250 (300-3/4)	
AUTHORIZATION REQUIRED						

