

LOC/DME I-PUW	APP CRS	Rwy Idg	7100
110.35	050°	TDZE	2567
Chan 40(Y)		Apt Elev	2567

ILS or LOC RWY 5

PULLMAN/MOSCOW RGNL (PUW)

DME required.

▼

▲

For inop ALS, increase S-ILS 5 all Cats visibility to RVR 4500 and S-LOC 5 Cat C/D visibility to 1½ SM.
† RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

AS


5

AS


5

MISSED APPROACH: Climb to 3460 then climbing left turn to 6000 direct PUW VOR/DME, continue climb-in-hold to 6000.
Missed approach requires minimum climb of 222 feet per NM to 4180.

ASOS 135.675	SEATTLE CENTER 123.95 290.55	UNICOM 122.8 (CTAF) 1
-----------------	---------------------------------	--------------------------

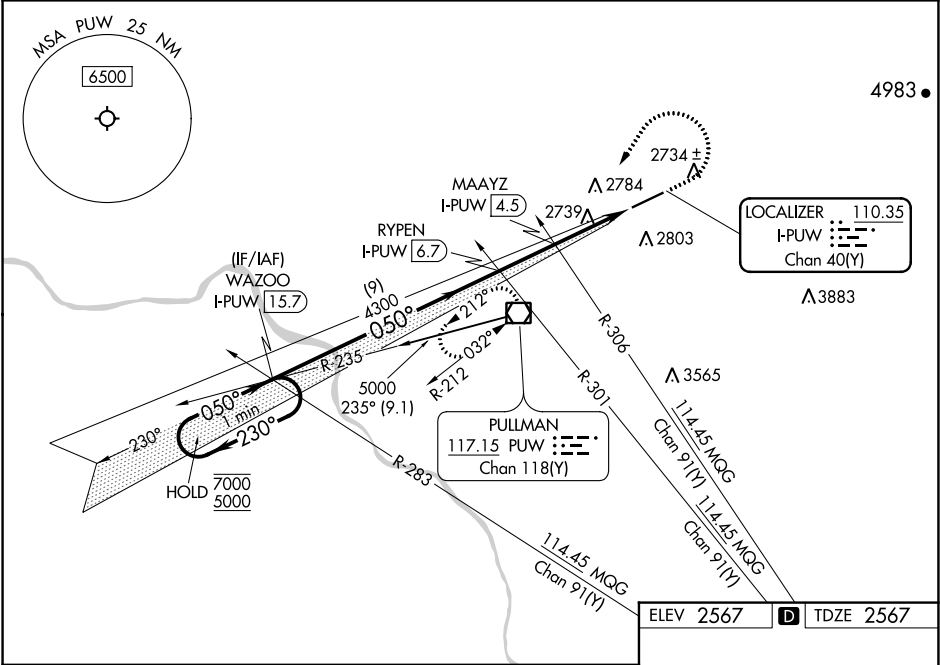

WAZOO I-PUW 15.7 One Minute Holding Pattern 7000 ← 230° 5000 ← 050° GS 3.00° TCH 50				
RYPEN I-PUW 6.7 MAAYZ I-PUW 4.5 * I-PUW 2.8 * 3600 9 NM 2.2 NM 1.7 NM 1.4 NM				
3460 6000 PUW * LOC only				
CATEGORY	A	B	C	D
S-ILS 5 #†	2767/24		200 (200-½)	
S-ILS 5	2857/24		290 (300-½)	
S-LOC 5	3060/24 493 (500-½)		3060/50 493 (500-1)	
CIRCLING	3080-1 513 (600-1)	3120-1 553 (600-1)	3140-1½ 573 (600-½)	3420-2¾ 853 (900-2¾)

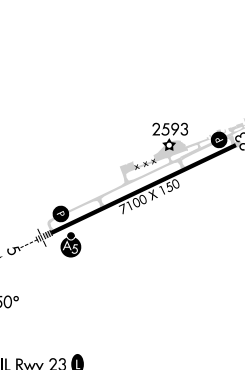ELEV 2567	D	TDZE 2567			
					
REIL Rwy 23 					
HIRL Rwy 5-23 					
FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46