

WAAS CH 50221 W23A	APP CRS 233°	Rwy Idg TDZE 124 Apt Elev 125
--	------------------------	---

RNAV (GPS) RWY 23


LUMBERTON RGNL (LBT)

RNP APCH - GPS.

Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Maxton altimeter setting: increase LPV DA to 469 feet and all visibility ½ SM; LNAV/VNAV DA to 495 feet and all visibility ⅓ SM; increase all MDAs 60 feet and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Maxton altimeter setting. Circling to Rwy 13 and 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 2200 direct AXJAB and on track 262° to TROCK and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

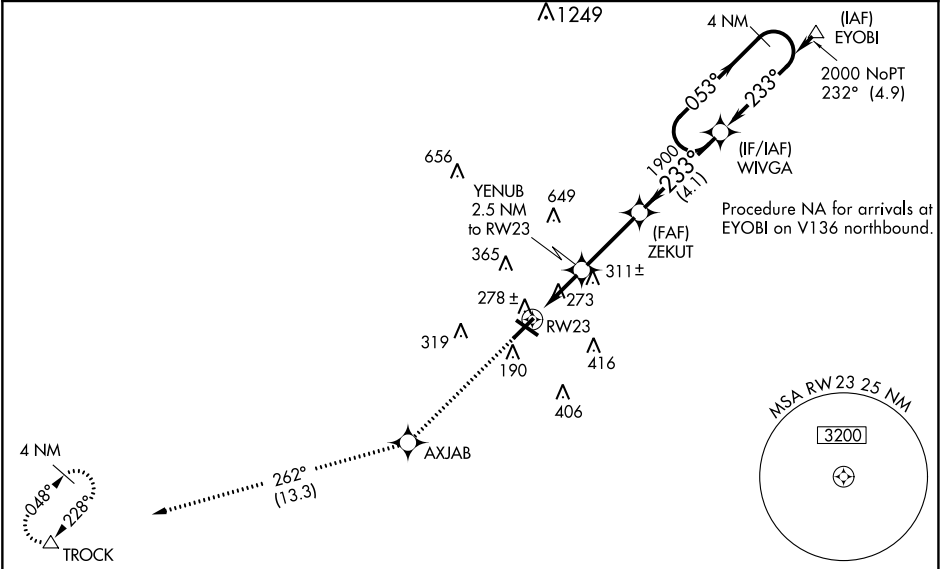

ELEV 125

TDZE 124

</