

WAAS	APP CRS	Rwy Idg	5342
CH 97421	053°	TDZE	124
W05A		Apt Elev	125

RNAV (GPS) RWY 5

LUMBERTON RGNL (LBT)

RNP APCH - GPS.


▼

▲

When local altimeter setting not received, use Maxton altimeter setting: increase LPV DA to 383 feet; LNAV/VNAV DA to 594 feet and all visibility ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C and Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Maxton altimeter setting. Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 2000 direct
WIVGA and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
-----------------	--------------------------------------	--------------------------

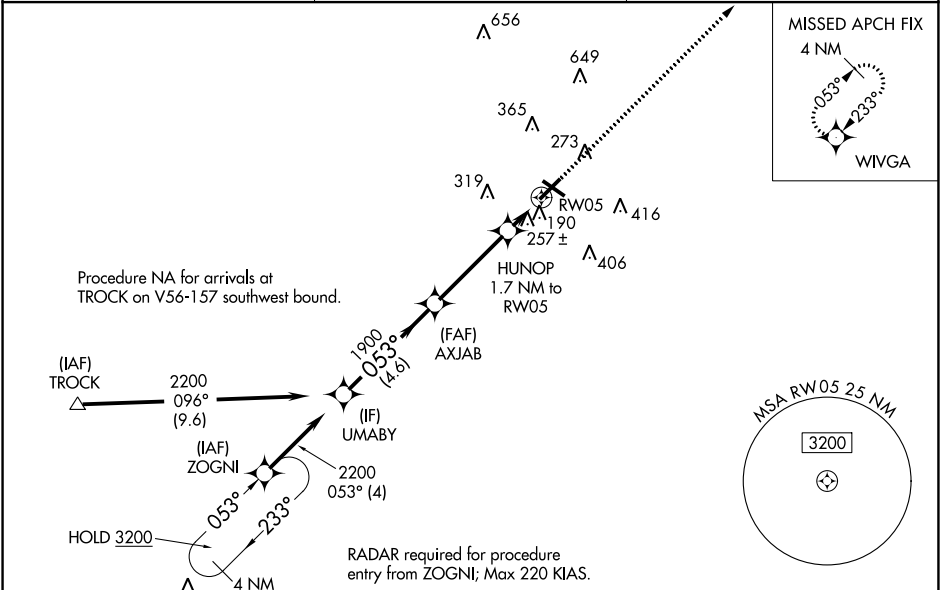

2114

UMABY

2200

Procedure Turn NA

GP 3.00° TCH 60

AXJAB

1900

HUNOP 1.7 NM to RW05

1900

720*

1.1 NM to RW05

RW05

2000

WIVGA

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	327-¾	203 (300-¾)		NA
LNAV/VNAV DA	538-1⅛	414 (500-1⅛)		NA
LNAV MDA	520-1	396 (400-1)	520-1⅛ 396 (400-1⅛)	NA
CIRCLING	660-1	535 (600-1)	720-1½ 595 (600-1½)	NA

ELEV 125

TDZE 124

2000

WIVGA

*LNAV only.

5003 X

5502 X 150

053° to RW05

MIRL Rwy 5-23 0

REIL Rws 5 and 23 0