

LOM MF

372

APP CRS

323°

Rwy Idg

9001

TDZE

1293

Apt Elev

1297

NDB RWY 32

MANSFIELD LAHM RGNL (MFD)

▼

▲

RADAR required for procedure entry.

▼

▲

For inoperative ALS increase Cats A/B visibility to 1 3/4 SM.

MALSR

AS


AS

AS

MISSED APPROACH: Climb to 2900

direct MFD VORTAC and hold.

ATIS	CLEVELAND APP CON ★	MANSFIELD TOWER ★	GND CON	UNICOM
125.3	124.2 360.65	119.8 (CTAF) 291.775	121.8 291.775	122.95

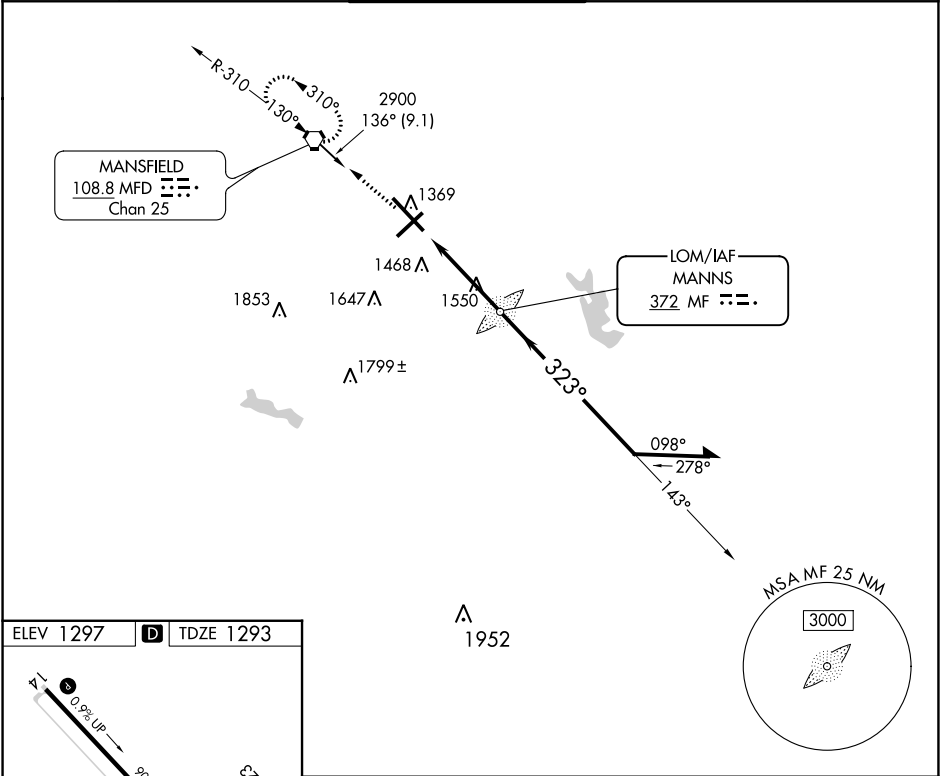

ELEV 1297

D

TDZE 1293

1

2

3

4

5

0.0% UP

8001 X 130

8819 X 150

TWR 1409

1354

323°

HIRL Rwys 5-23 and 14-32

REIL Rwys 5 and 23

FAF to MAP 4 NM

Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

2900

MFD

MF LOM

Remain within 10 NM

143°

323°

2700

3.16°

TCH 50

4 NM

CATEGORY	A	B	C	D
S-32	1900/40	607 (700-3/4)	1900-13/8	607 (700-13/8)
CIRCLING	1900-1	603 (700-1)	2000-2	2000-2 1/4
			703 (800-2)	703 (800-2 1/4)

EC-2, 30 NOV 2023 to 28 DEC 2023

EC-2, 30 NOV 2023 to 28 DEC 2023