

WAAS CH 48810 W09B	APP CRS 095°	Rwy Idg 5000 TDZE 39 Apt Elev 55
--	------------------------	---

RNAV (GPS) RWY 9R
ORLANDO SANFORD INTL (SFB)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0° C or above 54° C. Baro-VNAV and VDP NA when using Exec altimeter setting. When local altimeter setting not received, use Exec altimeter setting and increase LPV DA to 282, LNAV/VNAV DA to 501 and all MDA 60 feet; increase LNAV/VNAV all Cat C visibilities $\frac{1}{8}$ SM and LNAV Cat C/D visibility $\frac{1}{4}$ SM. Night landing: Rwy 27C NA.



MISSED APPROACH: Climb to 1600 direct WEPAT and hold.

ATIS
125,975




ORLANDO APP CON	
135.3	351.9 (NORTH)
119.775	351.9 (SOUTH)

SANFORD TOWER★
120.3(CTAF) **L** 254.35

GND CON
121.35 254.35

CLNC DEL
123.975

CLNC DEL
121.35
(when twr closed)

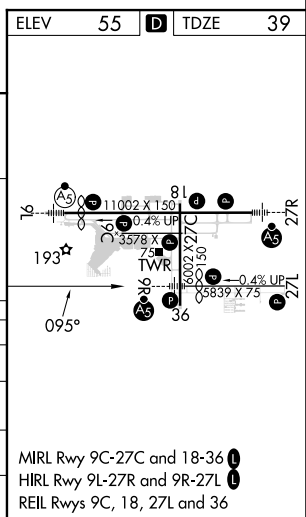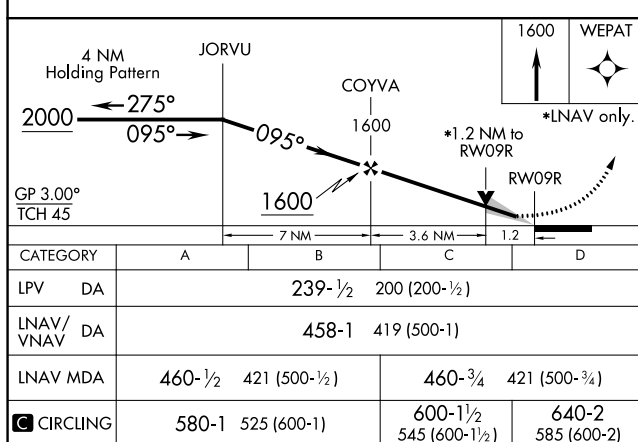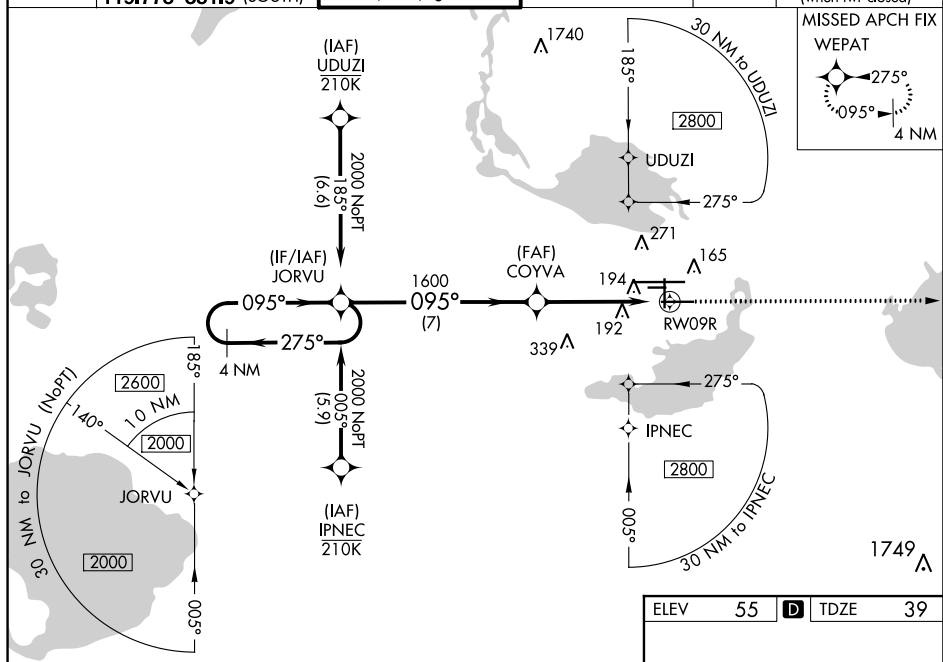

SE-3, 30 NOV 2023 to 28 DEC 2023

SE-3, 30 NOV 2023 to 28 DEC 2023