

WAAS CH 87019 W32A	APP CRS 325°	Rwy Idg TDZE Apt Elev	6306 2120 2143
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32
BRADFORD RGNL (BFD)

▼ For uncompensated Baro-VNAV systems. LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using St. Marys altimeter setting.


▲ DME/DME RNP-0.3 NA. Inop table does not apply to LPV and LNAV Cts A/B. For inop MALSR, increase LNAV/VNAV all Cts visibility to 1½ mile and LNAV Cts C/D visibility to 1¼ mile. When local altimeter setting not received, use St. Marys altimeter setting: increase LPV DA to 2455 feet; increase LNAV/VNAV DA to 2685 feet and all visibilities ½ SM; increase all MDAs 100 feet and Circling Cat C visibility ½ SM and Cat D ¼ SM. For inop MALSR, when using St. Marys altimeter setting, increase LPV all Cts visibility to 1½ mile.

MALSR





MISSED APPROACH:
Climb to 4500 direct
KONBE and hold.

ASOS 133.825	CLEVELAND CENTER 124.325 353.85	UNICOM 123.075 (CTAF) 0
------------------------	---	-----------------------------------

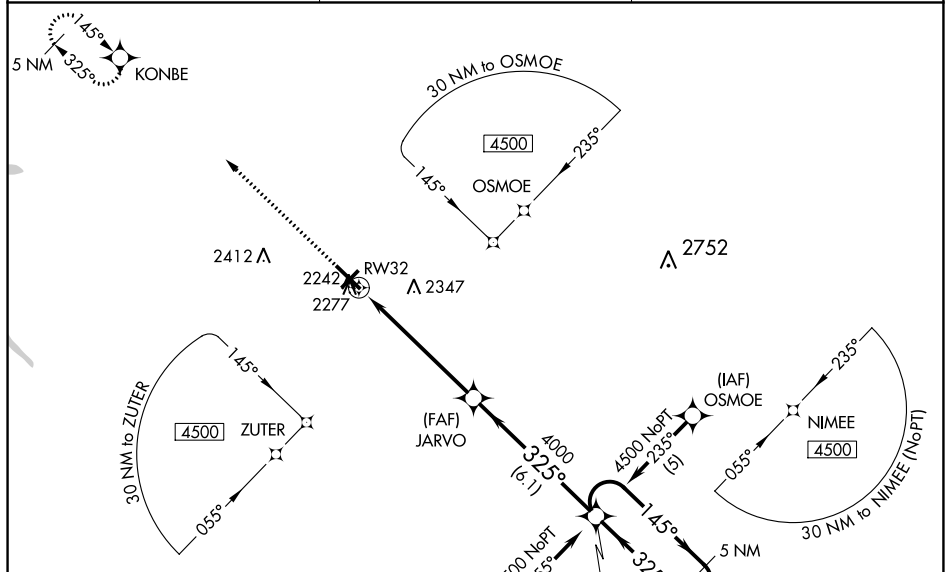

ELEV	2143	D	TDZE	2120
------	------	----------	------	------

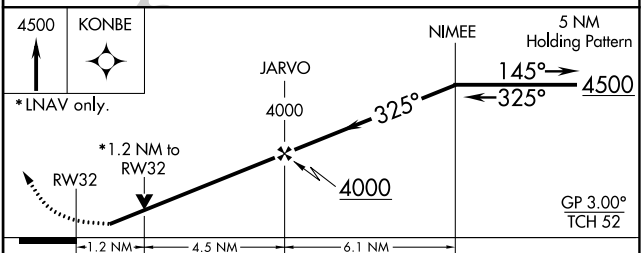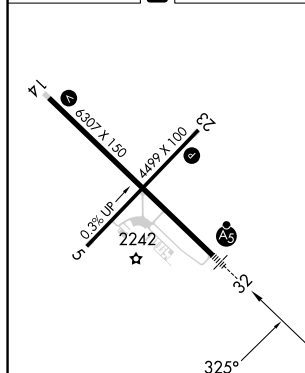

CATEGORY		A	B	C	D
LPV	DA	2370-1		250 (300-1)	
LNNAV/ VNAV	DA	2600-1½		480 (500-1½)	
LNNAV	MDA	2540-1		420 (400-1)	
CIRCLING		2620-1 477 (500-1)		2720-1½ 577 (600-1½) 2760-2 617 (700-2)	