

WAAS CH 90199 W28A	APP CRS 288°	Rwy Idg 6500 TDZE 341 Apt Elev 342
--	------------------------	---

RNAV (GPS) RWY 28


CAPE GIRARDEAU RGNL (CGI)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cairo Rgnl altimeter setting and increase all DA 48 feet and all MDA 60 feet; increase LPV all Cats, LNAV/VNAV all Cats, and Circling Cat C/D visibility ½ mile and LNAV Cat C/D visibility ½ mile. VDP NA when using Cairo Rgnl altimeter setting. Helicopter visibility reduction below ¾ SM NA. For inop ODALS, increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C/D visibilities ½ mile. When using Cairo Rgnl altimeter setting, for inop ODALS, increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C/D visibilities ½ mile. Baro-VNAV NA.

ODALS

MISSED APPROACH:
Climb to 3000 direct
IYIGO and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

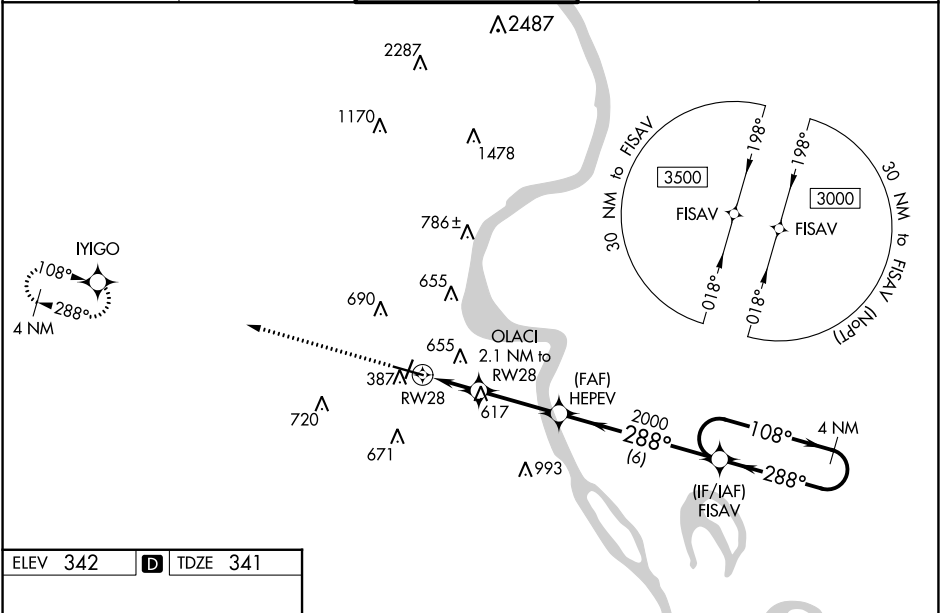

ELEV 342 D TDZE 341

MIRL Rwy 2-20 **0**
HIRL Rwy 10-28 **0**

	3000	IYIGO	HEPEV	FISAV	4 NM Holding Pattern
			OLACI 2.1 NM to RW28		
	*LNAV only		*1.6 NM to RW28		
			RW28		
			1040*		
			2000		
			288°		
			108°		
			3000		
			GP 3.00°		
			TCH 38		
CATEGORY	A	B	C	D	
LPV DA	723-1½ 382 (400-1½)				
LNAV/VNAV DA	821-1½ 480 (500-1½)				
LNAV MDA	880-¾	539 (600-¾)	880-1¾	539 (600-1¾)	
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)	

NC-3, 30 NOV 2023 to 28 DEC 2023

NC-3, 30 NOV 2023 to 28 DEC 2023