


WAAS CH 48912 W32A	APP CRS 319°	Rwy Idg TDZE 53 Apt Elev 53
--	------------------------	---


RNAV (GPS) RWY 32

SALISBURY-OCEAN CITY WICOMICO RGNL (SBY)

RNP APCH.					MALSR	MISSED APPROACH: Climb to 2100 direct HYDRS and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. When local altimeter setting not received use Georgetown altimeter setting: increase LPV DA to 305 feet; increase LNAV/VNAV DA to 510; increase all MDA 60 feet and LNAV Cat C and Circling Cat D visibility ¼ SM. For inoperative MALSR, increase LNAV Cat D visibility to 1 ¼ SM. VDP and Baro-VNAV NA when using Georgetown altimeter setting.					AS	
ASOS 118.325	PATUXENT APP CON ★ 127.95 314.0	SALISBURY TOWER ★ 119.425 (CTAF) 0	GND CON 123.775	CLNL DEL ★ 123.775	UNICOM 122.95	

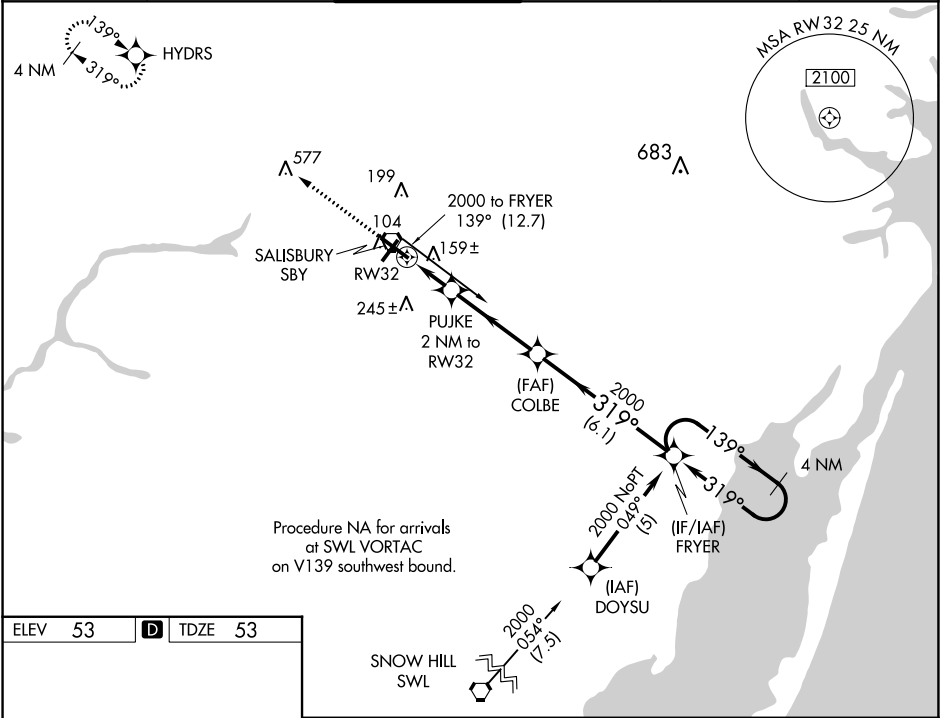

ELEV 53	D	TDZE 53
---------	---	---------

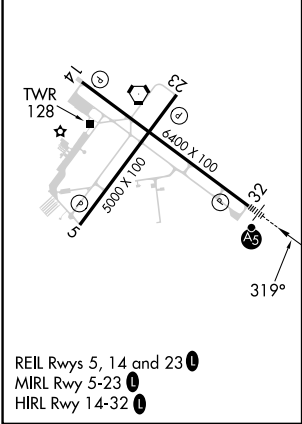

2100 HYDRS *LNAV only		COLBE	FRYER	4 NM Holding Pattern
PUJKE 2 NM to RW32		2000	319°	139° 2000
RW32		*1 NM to RW32	*740	GP 3.00° TCH 54
1 NM 1 NM 3.9 NM 6.1 NM				
CATEGORY	A	B	C	D
LPV DA	253-½		200 (200-½)	
LNAV/VNAV DA	458-1		405 (500-1)	
LNAV MDA	420-½		367 (400-½)	
CIRCLING		480-1 427 (500-1)	520-1 467 (500-1)	560-1½ 507 (600-1½)
		700-2 647 (700-2)		

NE-3, 30 NOV 2023 to 28 DEC 2023

NE-3, 30 NOV 2023 to 28 DEC 2023