

WAAS CH 48941 W35A	APP CRS 347°	Rwy Idg 8001 TDZE 2141 Apt Elev 2164
--	------------------------	---

RNAV (GPS) RWY 35
ASHEVILLE RGNL (AVL)

RNP APCH.				MISSED APPROACH: Climb to 6800 direct ONZIQ and hold, continue climb-in-hold to 6800.
	Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.			
ATIS 120.2	ASHEVILLE APP CON★ 124.65 269.575	ASHEVILLE TOWER★ 121.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95

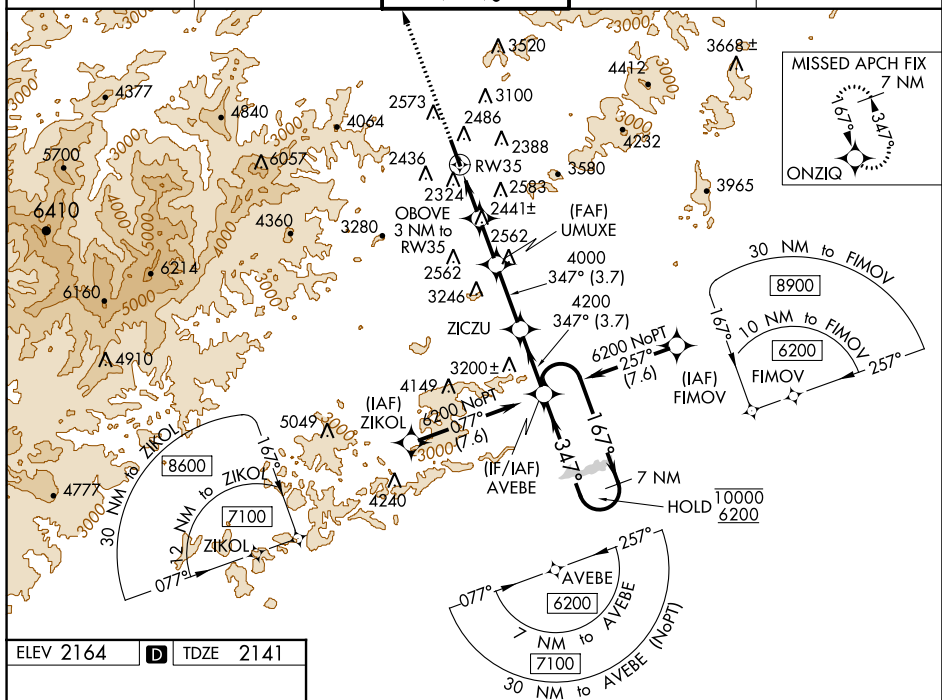


Diagram illustrating the RW35 approach procedure, showing the profile view and associated data.

Profile View Data:

- Altitudes (feet): 6800, 4000, 4200, 10000, 6200.
- Distances (NM): 1.5 NM, 1.5 NM, 2.7 NM, 3.7 NM, 3.7 NM.
- Angles: 347° to RW35, 167°, 347°.
- GP 3.00° TCH 56.

Table Data:

CATEGORY	A	B	C	D
LPV DA	2342/40	201 (200-¾)		
RNAV/VNAV DA	2577/40	436 (500-¾)		
RNAV MDA	2660/40	519 (500-¾)	2660/55 519 (500-1)	2660/50 519 (500-1)
C CIRCLING	2800-1 636 (700-1)	2880-1 716 (800-1)	3460-3 1296 (1300-3)	3720-3 1556 (1600-3)