

LOC I-DPA 109.5	APP CRS 097°	Rwy Idg 4750 TDZE 756 Apt Elev 759
---------------------------	------------------------	---

ILS or LOC RWY 10


DUPAGE (DPA)

⚠

When local altimeter setting not received, use Chicago/Aurora altimeter setting: increase S-ILS 10 DA to 993 feet; increase all MDA 40 feet and visibility S-LOC 10 Cats C/D and HOVUB INT minimums S-LOC 10 Cats C/D ½ SM, and Circling and HOVUB INT minimums Circling Cats C/D ¼ SM. Circling Rwy 15, 28, 33 NA at night.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2600 direct JOT VOR/DME and hold.

ATIS 132.075	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8	CLNC DEL 119.75
------------------------	---------------------------------------	------------------------------------	-------------------------	---------------------------

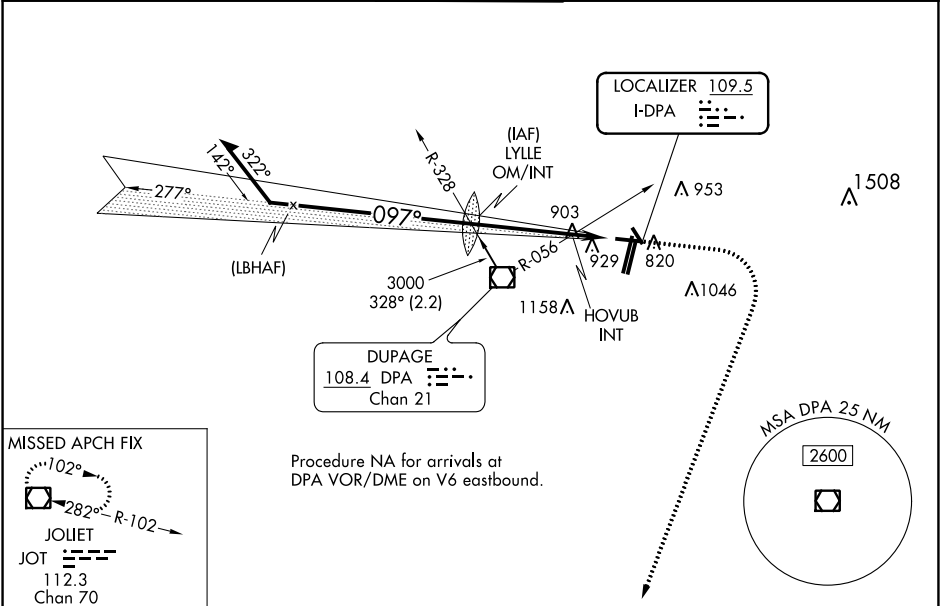

Remain within 10 NM				1200		2600		JOT		ELEV 759		TDZE 756	
				* LOC only. * 1340 when using Chicago/Aurora altimeter setting.									
GS 3.00° TCH 50													
3.6 NM 1.7 NM													
CATEGORY A B C D													
S-ILS 10 956-¾ 200 (200-¾)													
S-LOC 10 1300-1 544 (600-1) 1300-1½ 544 (600-1½)													
CIRCLING 1300-1 541 (600-1) 1360-1 601 (700-1) 1460-2 701 (800-2) 1460-2¼ 701 (800-2¼)													
HOVUB INT MINIMUMS (DUAL VOR RECEIVERS REQUIRED)													
S-LOC 10 1220-1 464 (500-1) 1220-1¾ 464 (500-1¾)													
CIRCLING 1260-1 501 (600-1) 1360-1 601 (700-1) 1460-2 701 (800-2) 1460-2¼ 701 (800-2¼)													
FAF to MAP 5.3 NM													
Knots		60		90		120		150		180			
Min:Sec		5:18		3:32		2:39		2:07		1:46			