

WAAS CH 93932 W01A	APP CRS 007°	Rwy Idg 8001 TDZE 1387 Apt Elev 1409
--	------------------------	---



RNAV (GPS) RWY 1

▼
▲ NA

Baro-VNAV NA when using Wichita Dwight D Eisenhower Ntl altimeter setting.
For uncorrected Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C and D and Circling Cat C and D visibility ¼ mile.

MISSED APPROACH.
Climb to 3000 direct
DOLBE and hold.

AWOS-3PT 119.45	WICHITA APP CON 134.8 269.1	BEECH TOWER ★ 126.8 (CTAF) 0 313.6	GND CON 121.7	CLNC DEL 125.0 (When tower closed)	UNICOM 122.95
---------------------------	---------------------------------------	--	-------------------------	---	-------------------------

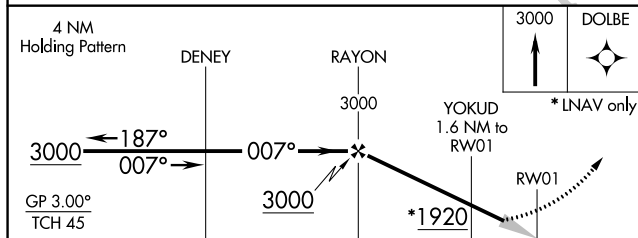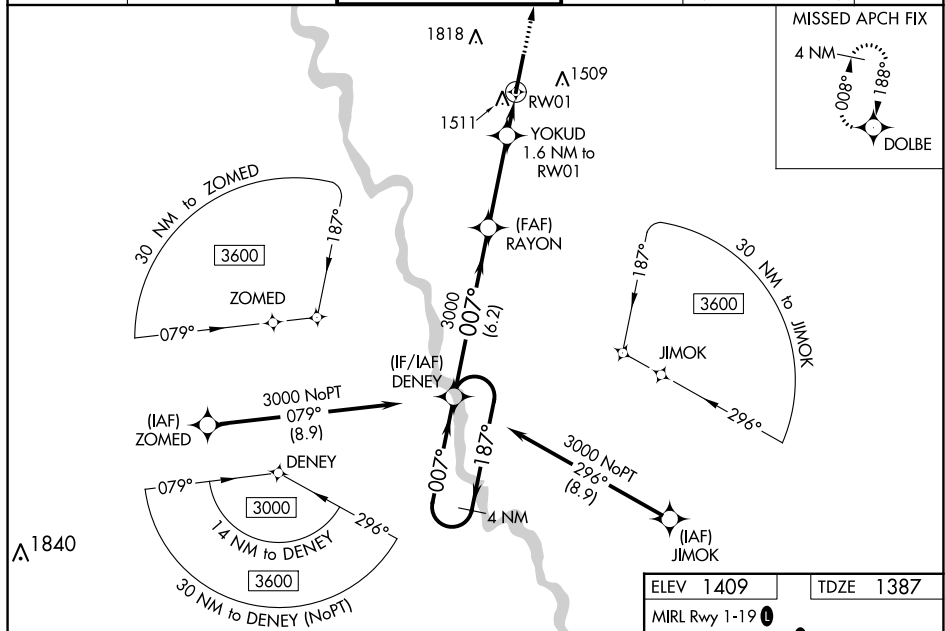

CATEGORY		A	B	C	D
LPV	DA	1637- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/ VNAV	DA	1688-1 301 (300-1)			
LNAV	MDA	1780-1	393 (400-1)	1780-1 ¹ / ₈	393 (400-1 ¹ / ₈)
 CIRCLING		1820-1 411 (500-1)	2120-1 711 (800-1)	2120-2 711 (800-2)	2120-2 ¹ / ₄ 711 (800-2 ¹ / ₄)

