

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>56223</b><br><b>W03A</b> | APP CRS<br><b>028°</b> | Rwy Idg<br>TDZE <b>888</b><br>Apt Elev <b>918</b> | <b>8003</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|

RNAV (GPS) RWY 3

APPLETON INTL (ATW)

▼


▲

Baro-VNAV NA below -16°C (4°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Green Bay-Austin Straubel Intl altimeter setting and increase all DAs/MDAs 100 feet. Baro/VNAV and VDP NA when using Green Bay-Austin Straubel Intl altimeter setting. For inoperative MALSR increase LPV visibility to RVR 4000 all Cats.

MALSR

MISSED APPROACH:  
Climb to 2700 direct ASIGE and hold.

|                       |                                          |                                                 |                         |                         |
|-----------------------|------------------------------------------|-------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>127.15</b> | GREEN BAY APP CON★<br><b>126.3 338.2</b> | APPLETON TOWER★<br><b>119.6</b> (CTAF) <b>0</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|------------------------------------------|-------------------------------------------------|-------------------------|-------------------------|

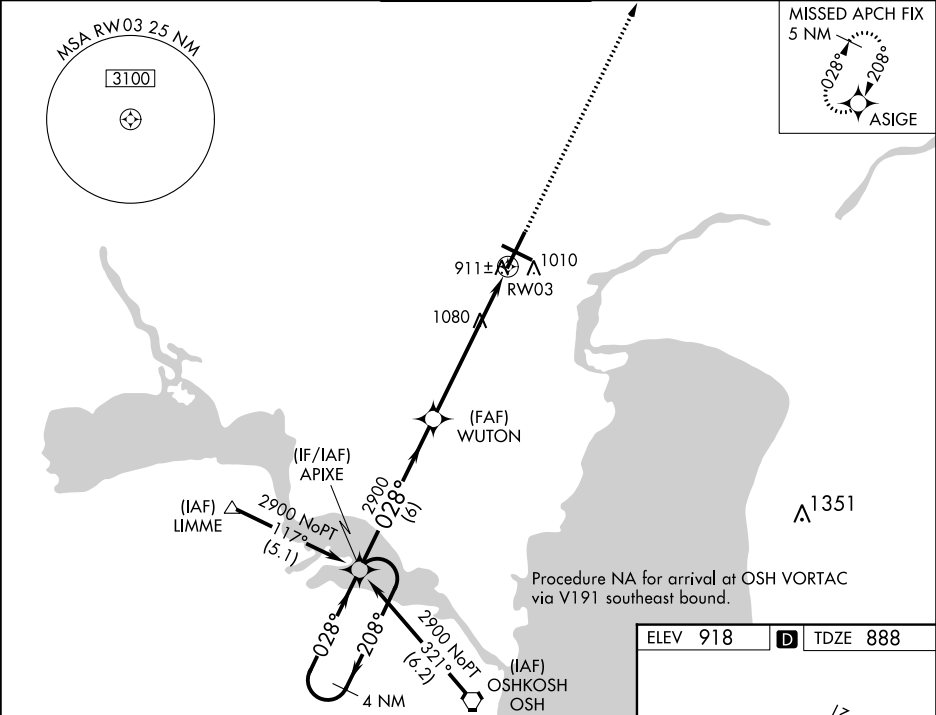

|                                                                                                                                                                                                            |         |             |                        |                        |            |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------------|------------------------|------------------------|------------|--|
| 4 NM Holding Pattern                                                                                                                                                                                       |         |             |                        |                        | 2700 ASIGE |  |
| <div>GP 3.00°<br/>TCH 47</div> <div>2900 ← 208°<br/>2900 → 028°</div> <div>2900</div> <div>6 NM</div> <div>4.6 NM</div> <div>1.5 NM</div> <div>*1.5 NM to RW03</div> <div>*LNAV only</div> <div>RW03</div> |         |             |                        |                        |            |  |
| CATEGORY                                                                                                                                                                                                   | A       | B           | C                      | D                      |            |  |
| LPV DA                                                                                                                                                                                                     | 1138/24 |             | 250 (300-½)            |                        |            |  |
| LNAV/VNAV DA                                                                                                                                                                                               | 1232/40 |             | 344 (400-¾)            |                        |            |  |
| LNAV MDA                                                                                                                                                                                                   | 1400/24 | 512 (500-½) | 1400/50<br>512 (500-1) | 1400/60<br>512 (500-¼) |            |  |
| CIRCLING                                                                                                                                                                                                   | 1400-1  | 482 (500-1) | 1400-1½<br>482 (500-½) | 1480-2<br>562 (600-2)  |            |  |

