


GPS required. When local altimeter setting not received, use Olive Branch altimeter setting and increase all MDA 100 feet; increase S-LOC Cats C, D visibility 3/8 mile, and Circling Cat C visibility 1/4 mile.

MISSED APPROACH: Climb to 1100 then climbing left turn to 2800 direct JODIB INT and hold.

AWOS-3PT	MEMPHIS CENTER	GCO	UNICOM
132.725	128.5 279.55	135.075	123.0 (CTAF) 0

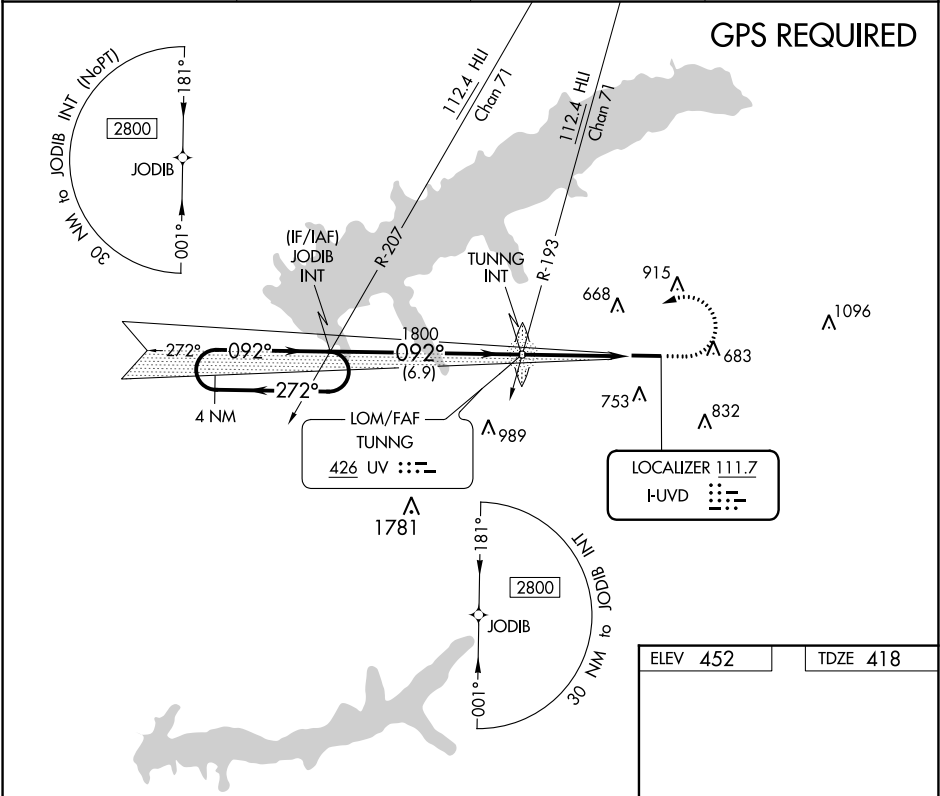

4 NM Holding Pattern	JODIB INT	1100	2800	JODIB INT
2800	272°	092°	092°	092°
			3.20°	TCH 40
			1800	
			6.9 NM	4 NM
CATEGORY	A	B	C	D
S-LOC 9	920-1	502 (500-1)	920-1 3/8	502 (500-1 3/8)
CIRCLING	980-1 528 (600-1)	1060-1 608 (700-1)	1380-2 3/4 928 (1000-2 3/4)	1380-3 928 (1000-3)
MRL Rwy 9-27 0 REIL Rlys 9 and 27 0				
FAF to MAP 4 NM				
Knots	60	90	120	150
Min:Sec	4:00	2:40	2:00	1:36
				1:20