
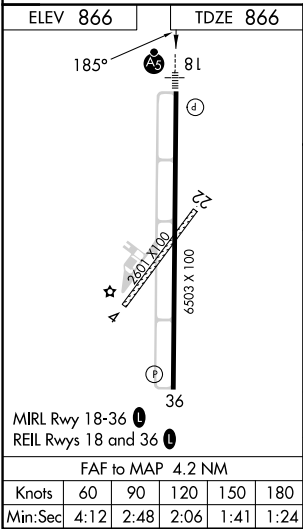


LOC I-SQK 108.35	APP CRS 185°	Rwy Idg TDZE Apt Elev 6503 866 866	ILS or LOC RWY 18 METTEL FLD (CEV)
----------------------------	------------------------	--	---------------------------------------

ADF required.		
NA Circle NA to Rws 4 and 22. For inop MALSR, increase S-LOC 18 Cats C/D visibility to 1½ mile. When local altimeter setting not received, use James M Cox Dayton Intl altimeter setting and increase ILS DA to 1237 feet and visibility all Cats to ¾ mile, increase all MDA 140 feet and LOC Cats C/D visibility to 1½ mile, and Circling Cat B visibility to 1¼ miles and Cat C to 2¾ miles and Cat D to 3 miles. When using James M Cox Dayton Intl altimeter setting: for inop MALSR, increase S-ILS 18 all Cats visibility to 1 mile and increase S-LOC 18 Cat A/B visibility to 1 mile and Cat C/D to 1½ mile.	MALSR	MISSED APPROACH: Climb to 2800 then left turn direct SQ LOM and hold.

AWOS-3 118.325	COLUMBUS APP CON 118.425 352.05	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

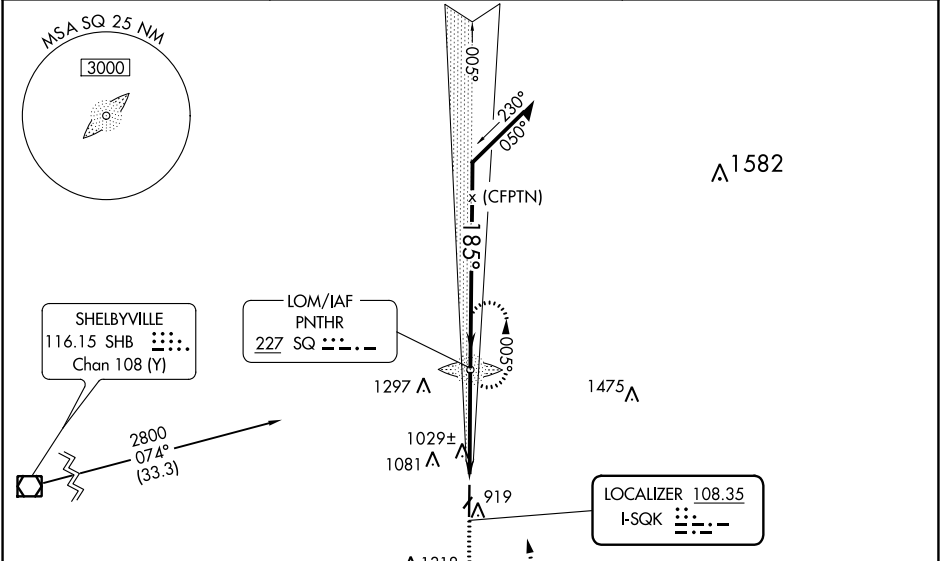

2800  2800  SQ  SQ LOM  Remain within 10 NM  1318  1305 1328 				
2255 005° 2800 185° 2300 GS 3.00° TCH 46 4.2 NM				
CATEGORY	A	B	C	D
S-ILS 18	1116-1/2 250 (300-1/2)			
S-LOC 18	1280-1/2 414 (500-1/2)	1280-3/4 414 (500-3/4)		
 CIRCLING	1440-1 574 (600-1)	1540-1 674 (700-1)	1620-2 1/4 754 (800-2 1/4)	1620-2 1/2 754 (800-2 1/2)