

D-ATIS
1124.05
CLNC D
1128.1
CPDLC
GND C
1118.57
1121.7 (H
HOUST
1120.72
1125.35
1127.3 2
1135.15
HOUST
1126.67

TAKEOFF MINIMUMS


Rwys 15L/R, 26L/R, 27, 33L/R: Standard with minimum climb of 500' per NM to 1200.

NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: For use during west flow at LAH, for east flow file the PITZZ DEPARTURE.

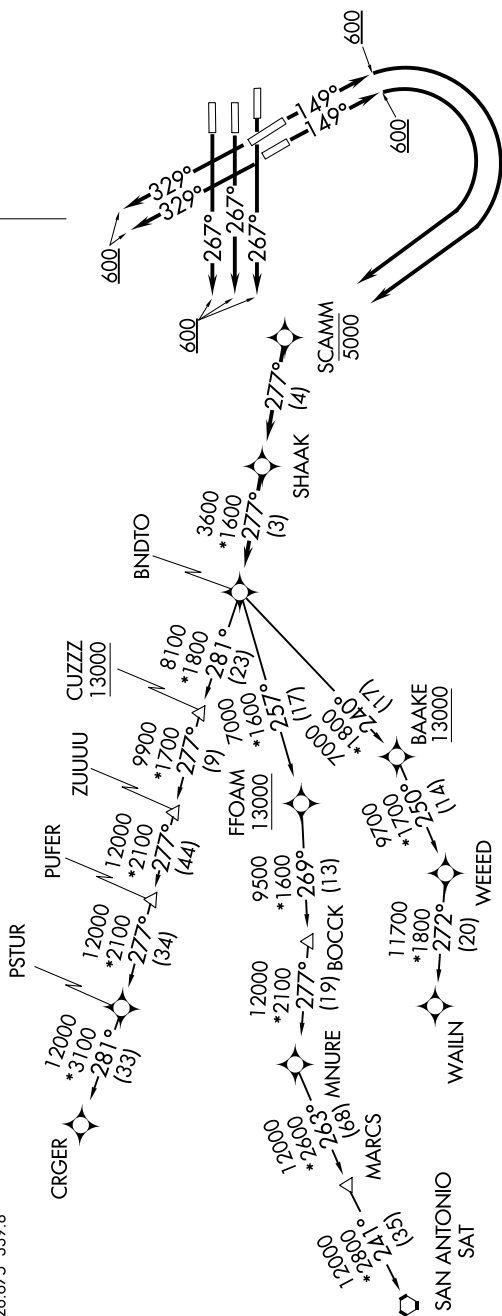

BNDTO FIVE DEPARTURE (RNAV)

(BNDTO5.BNDTO) 10DEC15

HOUSTON, TEXAS

GEORGE BUSH INTCNTL/HOUSTON (IAH)