

WAAS CH 49226 W26D	APP CRS 267°	Rwy Idg 9402 TDZE 95 Apt Elev 96
--	------------------------	---



RNAV (GPS) Z RWY 26L
GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½, and LNAV Cat E visibility to 1¾. DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 26R and Rwy 27. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH:
Climb to 3000 direct
LUCEP and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOUSTON TOWER 125.35 290.2	GND CON 118.575	CLNC DEL 128.1	CPDLC
-------------------------	--	--------------------------------------	---------------------------	--------------------------	-------

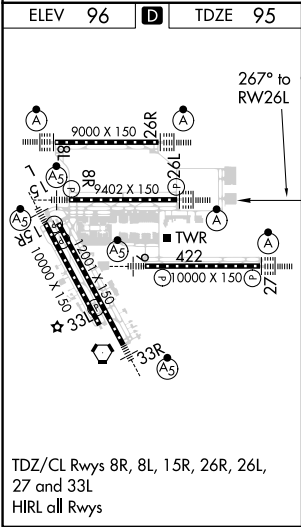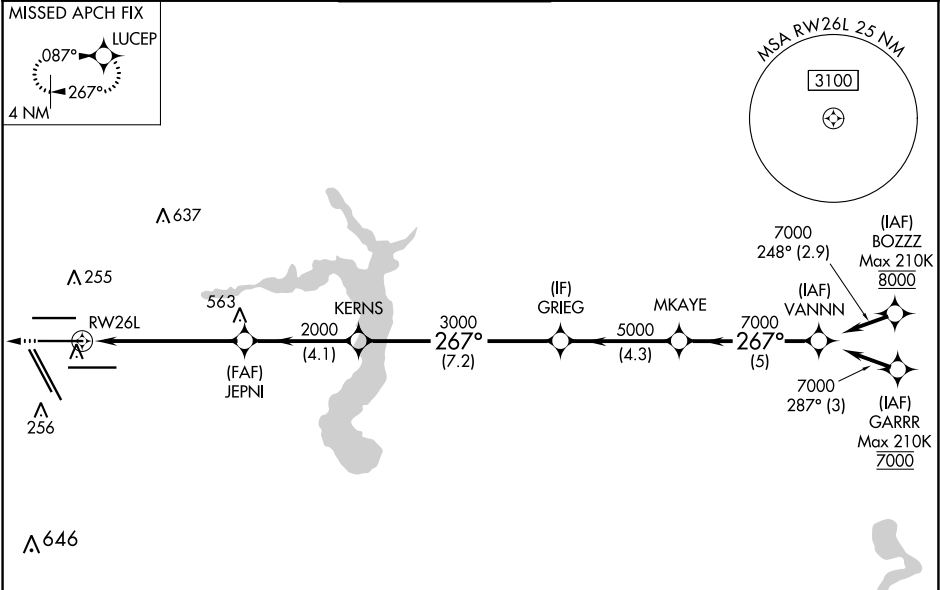

RADAR REQUIRED

3000 LUCEP

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 71°).

*LNAV only

*1.6 NM to RW26L

JEPNI 2000

KERNS

GRIEG

MKAYE

VANNN

7000

GP 3.00° TCH 56

	1.6 NM	4.2 NM	4.1 NM	7.2 NM	4.3 NM	5 NM
CATEGORY	A	B	C	D	E	
LPV DA	295/18		200 (200-½)			
LNAV/VNAV DA	586/60		491 (500-1¼)			
LNAV MDA	680/24	585 (600-½)	680-1¼		585 (600-1¼)	

SC-5, 30 NOV 2023 to 28 DEC 2023

SC-5, 30 NOV 2023 to 28 DEC 2023