

APP CRS
281°

Rwy Idg
TDZE
1934
Apt Elev
1934

RNAV (GPS) RWY 28

ST MARYS MUNI (OYM)

RNP APCH - GPS.

▼

▲

☼ -36°C

Rwy 28 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LNAV Cat A. VDP NA when using Bradford altimeter setting. When local altimeter setting not received, use Bradford altimeter setting and increase all MDA 240 feet, LNAV visibility Cats B/C/D ½ SM, and Circling visibility Cats B/C ½ SM. For inop ALS increase LNAV visibility Cat C/D to 2½ SM. For inop ALS when using Bradford altimeter setting, increase LNAV visibility Cat C/D to 3 SM.



MALS

☼

☼

MISSED APPROACH:
Climb to 4000 direct PUNKS and hold.

AWOS-3P 118.05	CLEVELAND CENTER 126.725 291.65	ALTOONA CLNC DEL 122.4	UNICOM 122.7 (CTAF) 0
-------------------	------------------------------------	---------------------------	--------------------------

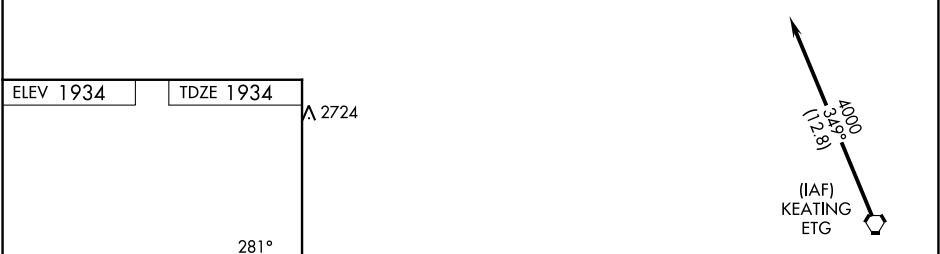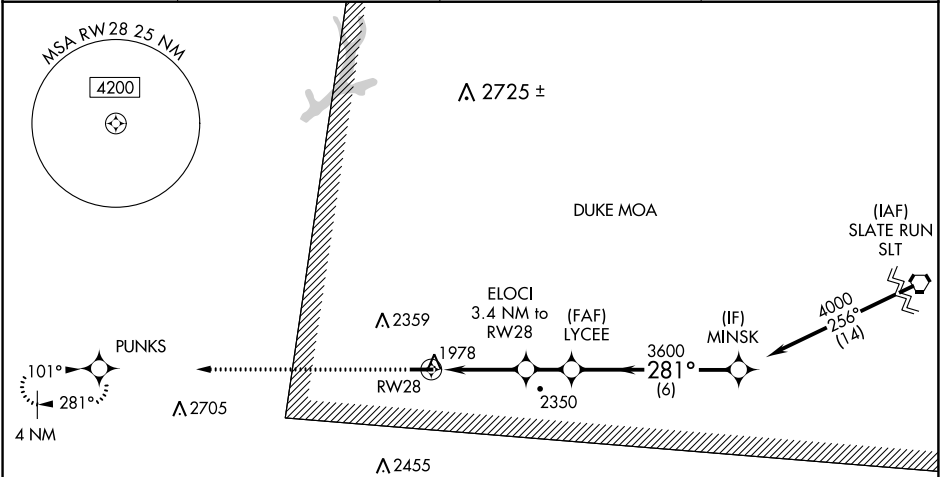

ELEV 1934	TDZE 1934	A 2724	A 2724
4000	PUNKS	ELOCI 3.4 NM to RW28	LYCEE
281°	0.7% UP	2.5 NM to RW28	3600
4300 X 75	28	3.04° TCH 40	4000
MIRL Rwy 10-28 0	2.5	1 NM	1.6 NM
6 NM	6 NM	6 NM	6 NM
CATEGORY	A	B	C
LNAV MDA	2760-1	826 (900-1)	2760-2
CIRCLING	2760-1¼	826 (900-1¼)	2760-2½
			2840-3
			906 (1000-3)