

WAAS CH 99313 W19A	APP CRS 190°	Rwy Idg 6604 TDZE 91 Apt Elev 91
--	------------------------	---



RNAV (GPS) RWY 19
H L SONNY CALLAHAN (CQF')


T Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).

A DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

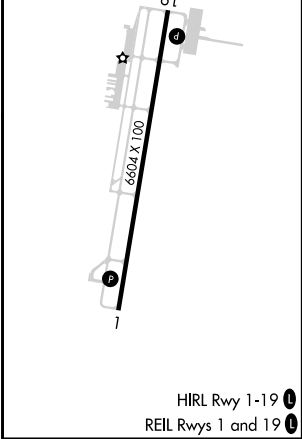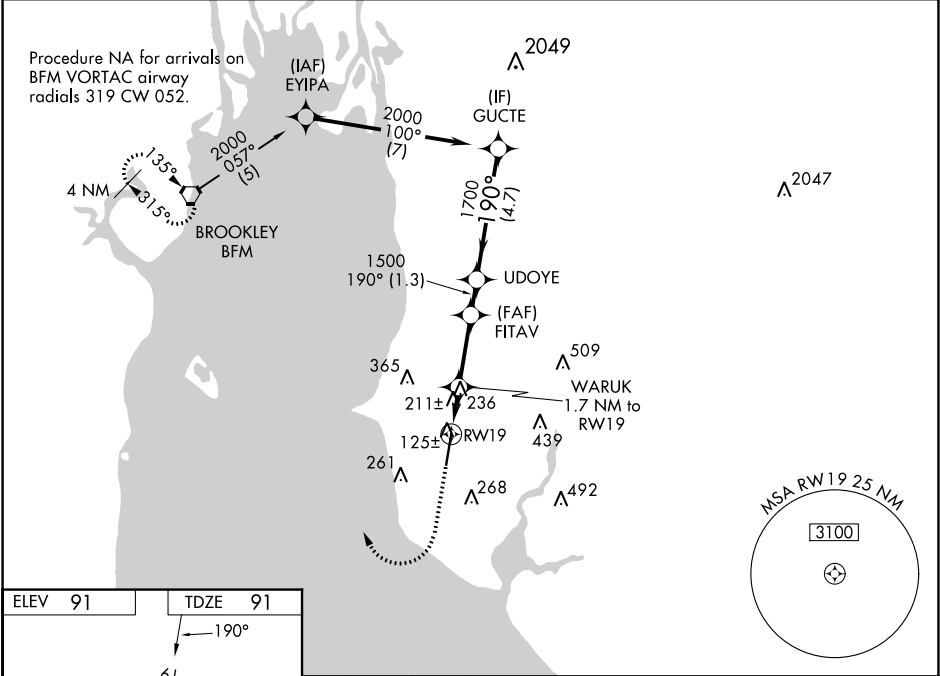

1500	2000	BFM	GUCTE				
			<u>2000</u>				
*LNAV only.		WARUK 1.7 NM to RW19	FITAV 1500	UDOYE <u>1700</u>	Procedure Turn NA		
		*1.2 NM to RW19		<u>1500</u>	GP 3.00° TCH 35		
1.2		0.5	2.6	1.3 NM	4.7 NM		
CATEGORY	A		B		C		D
LPV DA			341-7/8		250 (300-7/8)		
LNAV/ VNAV DA			513-1½		422 (500-1½)		
LNAV MDA	500-1		409 (500-1)		500-1½		409 (500-1½)
CIRCLING	560-1		580-1		720-1¾		740-2
	469 (500-1)		489 (500-1)		629 (700-1¾)		649 (700-2)