
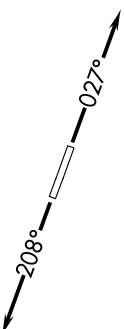


TOP ALTITUDE:
ASSIGNED BY ATCAWOS-3
119.075
CTAF
122.7
DETROIT DEP CON
134.3 284.0TAKEOFF MINIMUMS:
Standard.

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.

NOTE: Chart not to scale.

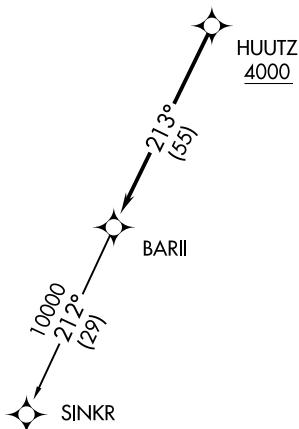

DEPARTURE ROUTE DESCRIPTION

TAKEOF RUNWAY 3: Climb on heading 027° or as assigned for RADAR vectors to cross HUUTZ at or above 4000, thence....

TAKEOF RUNWAY 21: Climb on heading 208° or as assigned for RADAR vectors to cross HUUTZ at or above 4000, thence....

....on track 213° to BARII, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

SINKR TRANSITION (BARI2.SINKR):