

WAAS
CH **48836**
W24A

APP CRS
240°

Rwy Idg
TDZE
597

Apt Elev
616

RNAV (GPS) RWY 24
BURLINGTON/ALAMANCE RGNL (BUY)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greensboro altimeter setting and increase all DA 97 feet and all MDA 100 feet. Increase LPV, LNAV/VNAV, LNAV Cats C/D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Greensboro altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 4000 direct KAKLE and hold.

ASOS 135.325	GREENSBORO APP CON 126.6 327.075	CLNC DEL 120.25	UNICOM 122.975 (CTAF) 0
------------------------	--	---------------------------	--

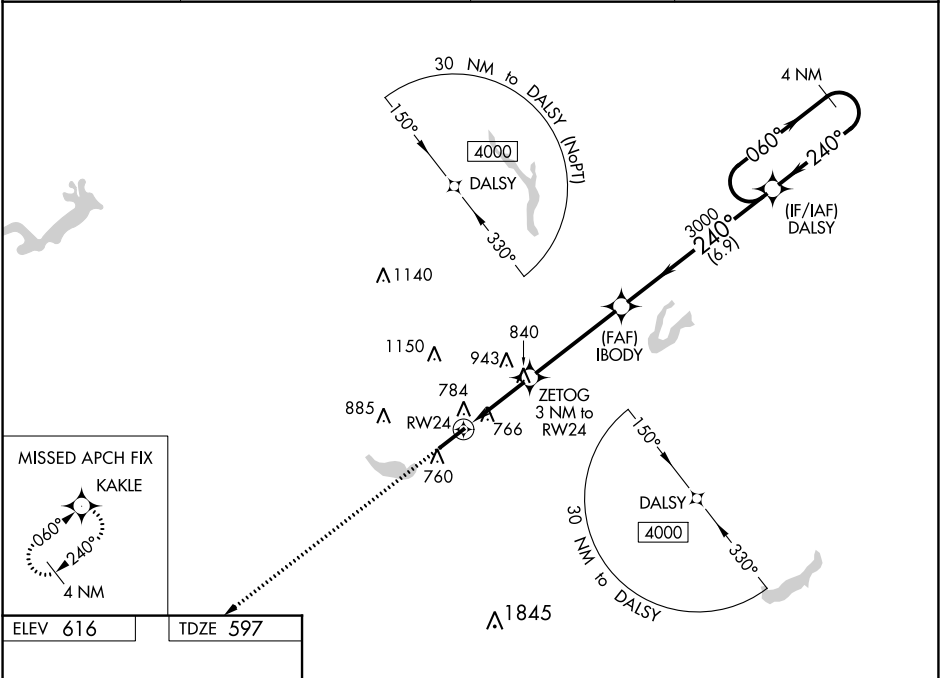

ELEV **616**

TDZE **597**

4000

KAKLE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 59).

*LNAV only

*1.3 NM to RW24

*1600

3000

4000

GP 3.10°

TCH 60

1.3

1.7 NM

4.2 NM

6.9 NM

CATEGORY	A	B	C	D
LPV DA	987-1¼		390 (400-1¼)	
LNAV/VNAV DA	1056-1½		459 (500-1½)	
LNAV MDA	1060-1 463 (500-1)		1060-1¾ 463 (500-1¾)	
CIRCLING	1100-1 484 (500-1)		1520-3 904 (1000-2¾) 1520-3 904 (1000-3)	