

WAAS
CH **72619**
W18A

APP CRS
183°

Rwy Idg **5404**
TDZE **173**
Apt Elev **173**

RNAV (GPS) RWY 18

FLETCHER FLD (CKM)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Tunica altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 483 feet, LNAV/VNAV DA to 647 feet and all MDA 60 feet; increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ½ SM. Circling Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2000 direct HULON and hold.

AWOS-3 120.675	MEMPHIS CENTER 135.3 335.8	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

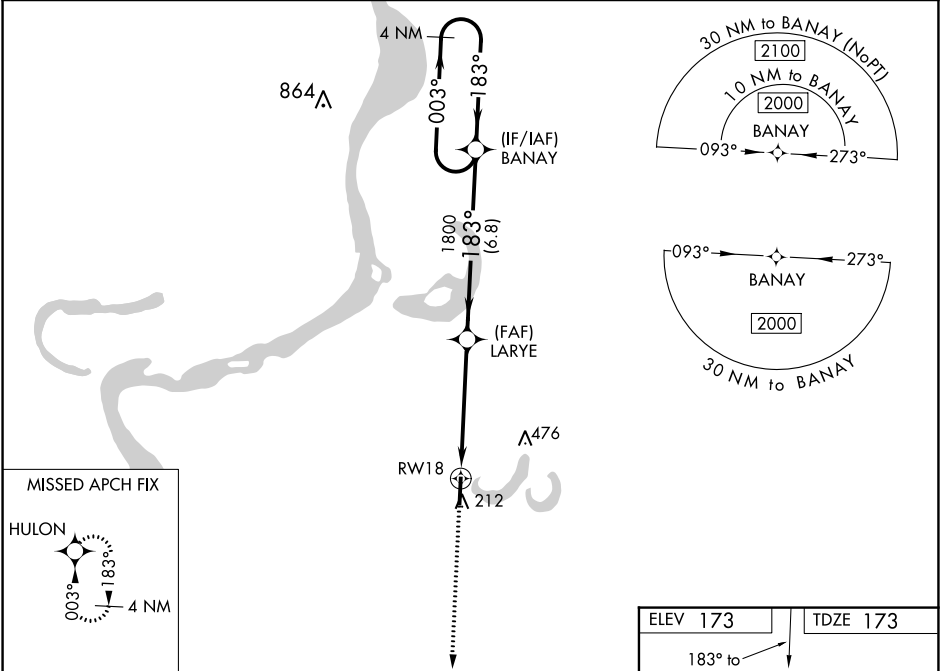

2000	HULON	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).				4 NM Holding Pattern
*LNAV only			LARYE	BANAY		
			1800	1800	2000	
			183°	183°	003°	
			1800			GP 3.00° TCH 40
			1.4 NM	3.6 NM	6.8 NM	
CATEGORY	A	B	C	D		
LPV DA	423-7⁄8		250 (300-7⁄8)			
LNAV/VNAV DA	587-13⁄8		414 (500-13⁄8)			
LNAV MDA	640-1	467 (500-1)	640-13⁄8	467 (500-13⁄8)		
CIRCLING	740-1	567 (600-1)	780-13⁄4 607 (700-13⁄4)	780-2 607 (700-2)		

