



23278

RNAV (GPS) RWY 5
BARTOW EXEC (BOW)


▼ Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 553 feet, LNAV/VNAV DA to 684 feet and all MDA 120 feet, increase LNAV Cat C visibility $\frac{1}{4}$ SM, Cat D $\frac{1}{2}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C . VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH:
Climb to 2300 direct
ZOMOV and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 0 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

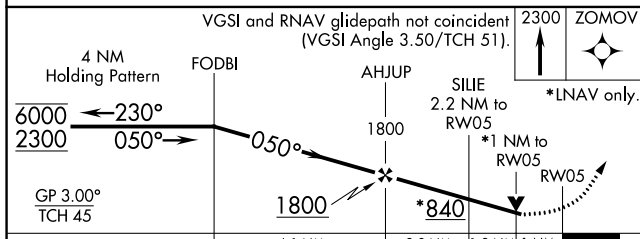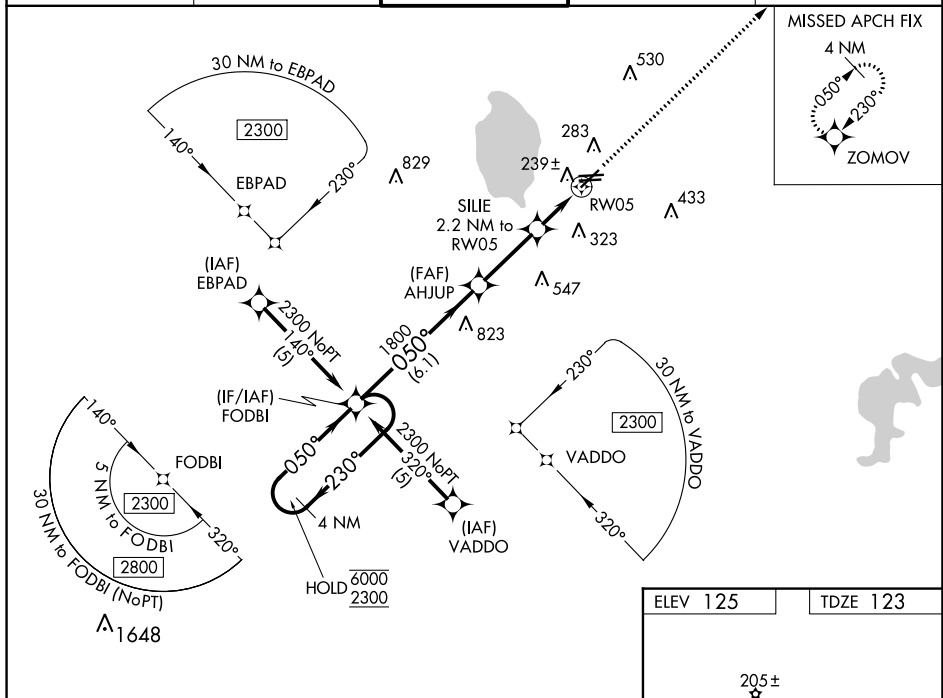

CATEGORY		A		B		C		D	
LPV	DA			447-1¼		324 (400-1¼)			
LNAV/ VNAV	DA			509-1½		386 (400-1½)			
LNAV	MDA	520-1		397 (400-1)		520-1½ 397 (400-1½)		520-1¼ 397 (400-1¼)	

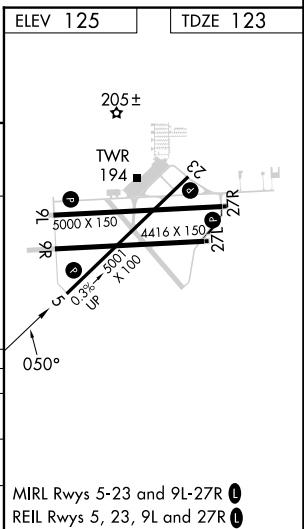

BARTOW EXEC (BOW)
RNAV (GPS) RWY 5

SE-3, 30 NOV 2023 to 28 DEC 2023