


WAAS CH 49229 W29A	APP CRS 291°	Rwy Idg TDZE Apt Elev	5091 1989 1989
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29
L M CLAYTON (OLF)

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wokaf FLD/Glasgow-Volley County altimeter setting: increase LPV DA to 2330 ft and visibility $\frac{3}{8}$ SM, LNAV/VNAV DA to 2380 ft and visibility $\frac{1}{2}$ SM; increase all MDA 160 feet and LNAV and Circling visibility Cat C/D $\frac{1}{2}$ SM. Baro-VNAV and VDP NA with Glasgow altimeter setting.

MISSED APPROACH:
Climb to 4500 direct
RULIE and hold.

ASOS 118,325	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
-----------------	----------------------------------	--------------------------

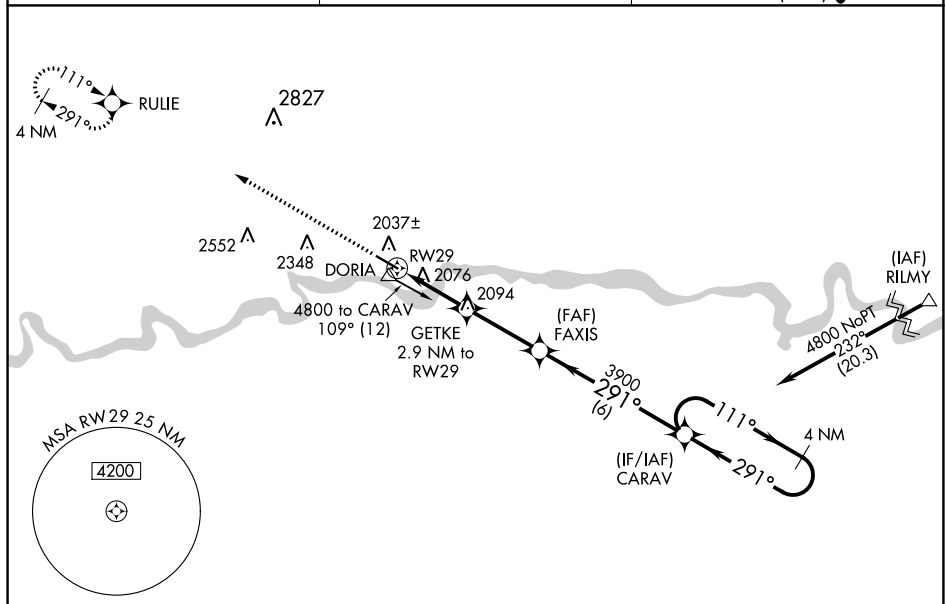

ELEV 1989		TDZE 1989
-----------	--	-----------

