

WAAS CH 62834 W09A	APP CRS 092°	Rwy Idg 5000 TDZE 856 Apt Elev 861
--	------------------------	---

RNAV (GPS) RWY 9

FRANKFORT CLINTON COUNTY RGNL (FKR)

T

ANA

Baro-VNAV NA when using Indianapolis Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Indianapolis Exec altimeter setting. When local altimeter setting not received, use Indianapolis Exec altimeter setting: increase LPV DA to 1162 feet and visibility 1/8 SM all Cats; increase LNAV/VNAV DA to 1245 feet and visibility 1/8 SM all Cats; increase all MDAs 60 feet and LNAV and Circling Cats C/D visibilities 1/4 SM.

MISSED APPROACH:
Climb to 2500 direct
CAXEV and hold.

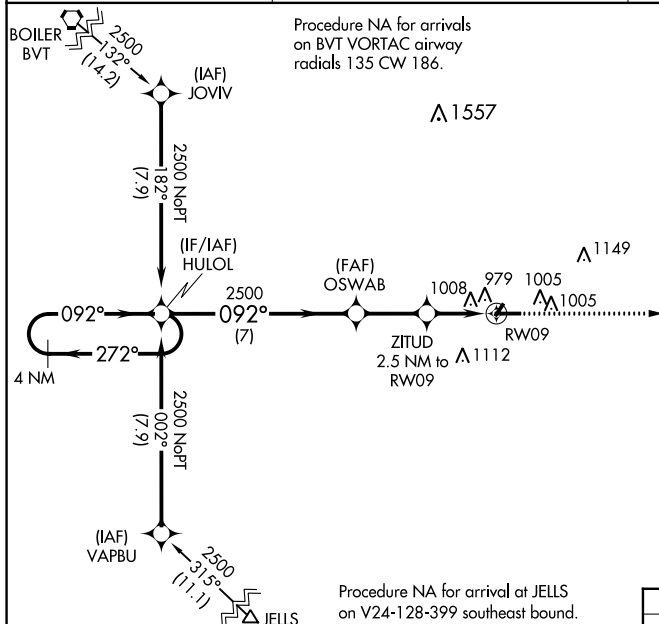
AWOS-3

124.325

GRISSOM APP CON ★

123.85 291.675

UNICOM

123.0 (CTAF) **L**

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

2500

CAXEV

4 NM
Holding Pattern

HUI QI

QSWA

ZITUD

* LNAV only

$$\frac{2500}{092^{\circ}} \xleftarrow{272^{\circ}}$$

GP 3.0C

--	--

|*1

NM to

1

W09

CATEGORY	A	B	C	D
LPV DA	1106-7 ⁷ / ₈ 250 (300-7 ⁷ / ₈)			
LNAV/VNAV DA	1189-1 333 (400-1)			
LNAV MDA	1260-1 404 (400-1)		1260-1 ¹ / ₈ 404 (400-1 ¹ / ₈)	
 CIRCLING	1460-1 599 (600-1)		1520-1 ³ / ₄ 659 (700-1 ³ / ₄)	1520-2 659 (700-2)