


VORTAC FBC	APP CRS	Rwy Idg	N/A
108.2	104°	TDZE	N/A
Chan 19		Apt Elev	830

VOR-A

WYANDOT COUNTY (56D)

Procedure NA at night. When local altimeter setting not received, use Marion altimeter setting: increase all MDAs 40 feet and visibility Cat C/D ¼ SM. NA	MISSED APPROACH: Climbing left turn to 2500 on FBC VORTAC R-104 to RITRO INT/15 DME and hold.
---	---

FDY ASOS	CLEVELAND APP CON ★	UNICOM
132.85	124.2 360.65	123.05 (CTAF) 0

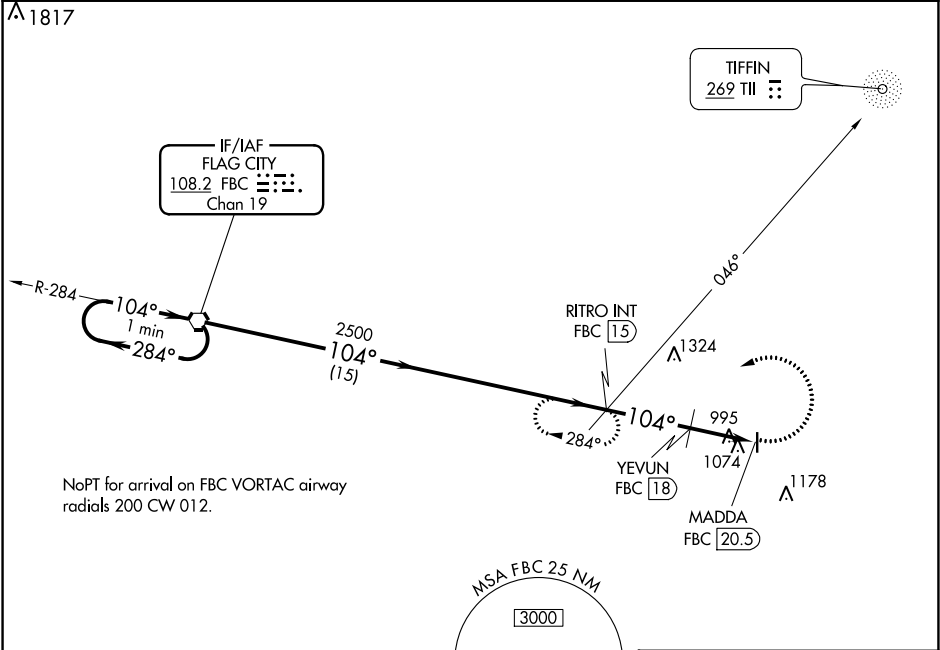

ADF or DME REQUIRED

ELEV 830

81
3697 X 75
36

One Minute Holding Pattern					2500 FBC R-104 RITRO INT	
2500 ←284° 104°→ FBC VORTAC 104° 2500 RITRO INT FBC 15 104° 1520 YEVUN FBC 18 2.5 MADDA FBC 20.5 15 NM 3 NM 2.5					104° 3997 X 75 36	
CATEGORY	A	B	C	D		
CIRCLING	1520-1 690 (700-1)	1520-1¼ 690 (700-1¼)	1540-2 710 (800-2)	1540-2¼ 710 (800-2¼)		
YEVUN FIX MINIMUMS (DME REQUIRED)						
CIRCLING	1420-1 590 (600-1)	1440-1 610 (700-1)	1540-2 710 (800-2)	1540-2¼ 710 (800-2¼)		
					IURL Rwy 18-36 0	
					FAF to MAP 5.5 NM	
					Knots	60 90 120 150 180
					Min:Sec	5:30 3:40 2:45 2:12 1:50