

WAAS CH 57930 W22A	APP CRS 220°	Rwy Idg TDZE 1171 Apt Elev 1171	3600
--	------------------------	---	-------------


RNAV (GPS) RWY 22

IOWA COUNTY (MRJ)

Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV all Cats visibility ½ mile and LNAV/VNAV all Cats visibility ¼ mile, increase all MDA 60 feet, and LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3500 direct ZUPOV and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

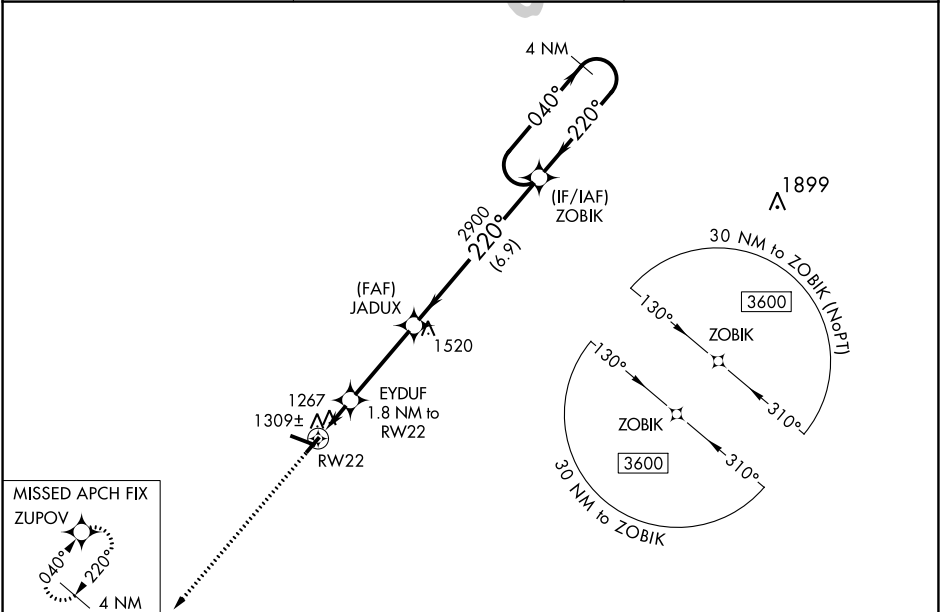

ELEV 1171	TDZE 1171
-----------	-----------

3500 ZUPOV VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30). 4 NM Holding Pattern

220° to RW22

*LNAV only EYDUF 1.8 NM to RW22 JADUX 2900 ZOBIK

*1.2 NM to RW22

*1780

2900

040° 3600

220°

GP 3.00° TCH 40

1.2 0.6 3.5 NM 6.9 NM

CATEGORY	A	B	C	D
LPV DA	1371-¾	200 (200-¾)		NA
LNAV/VNAV DA	1479-1	308 (400-1)		NA
LNAV MDA	1580-1	409 (500-1)	1580-1½ 409 (500-1½)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

REIL Rwy 11 and 29
MIRL Rwy 4-22 and 11-29