


WAAS CH 93530 W04A	APP CRS 040°	Rwy Idg TDZE 1168 Apt Elev 1171
--	------------------------	---

RNAV (GPS) RWY 4
IOWA COUNTY (MRJ)

Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV all Cats visibility 1/8 mile and LNAV/VNAV all Cats visibility 1/4 mile, increase all MDA 60 feet, and LNAV Cat C visibility 1/4 mile. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3600 direct ZOBIK and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

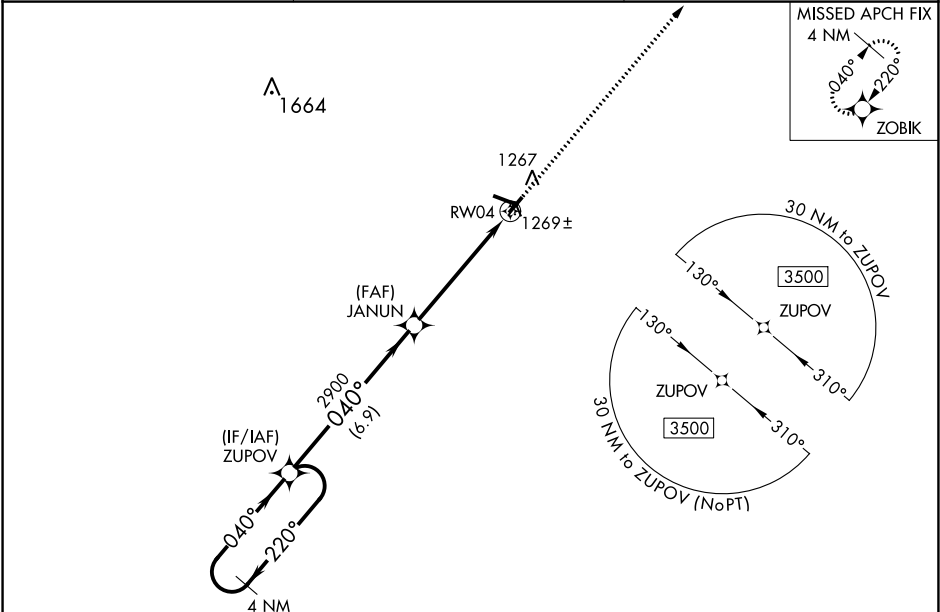

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		3600 ZOBIK	
ZUPOV		JANUN		* LNAV only	
3500 ← 220° 040° →		2900		* 1.2 NM to RW04	
GP 3.00° TCH 40		2900		RW04	
6.9 NM		4.1 NM		1.2 NM	
CATEGORY	A	B	C	D	
LPV DA	1368-3/4 200 (200-3/4)			NA	
LNAV/VNAV DA	1443-7/8 275 (300-7/8)			NA	
LNAV MDA	1580-1	412 (500-1)	1580-1 1/8 412 (500-1 1/8)	NA	
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1 1/2 469 (500-1 1/2)	NA	

ELEV 1171 TDZE 1168

REIL Rwy 11 and 29 0
MIRL Rwy 4-22 and 11-29 0