


WAAS CH 70522 W21A	APP CRS 213°	Rwy Idg TDZE 718 Apt Elev 718	5001 718 718
--	------------------------	---	---

RNAV (GPS) RWY 21
MARK ANTON (2A0)

NA Baro-VNAV NA when using Chattanooga altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. When VGSI inop, Straight-in/Circling Rwy 21 NA at night. When local altimeter setting not received, use Chattanooga altimeter setting: increase LPV DA to 1085 feet, LNAV/VNAV DA to 1249 feet, and visibility LPV and LNAV/VNAV all Cats ¼ SM; increase all MDA 80 feet and visibility LNAV Cat C/D ¼ SM and Circling Cat C ½ SM. Rwy 21 helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climb to 3900 direct CETPO and hold, continue climb-in-hold to 3900.
---	---

AWOS-3 135.075	CHATTANOOGA APP CON ★ 125.1 379.1	UNICOM 123.0 (CTAF)
--------------------------	---	-------------------------------

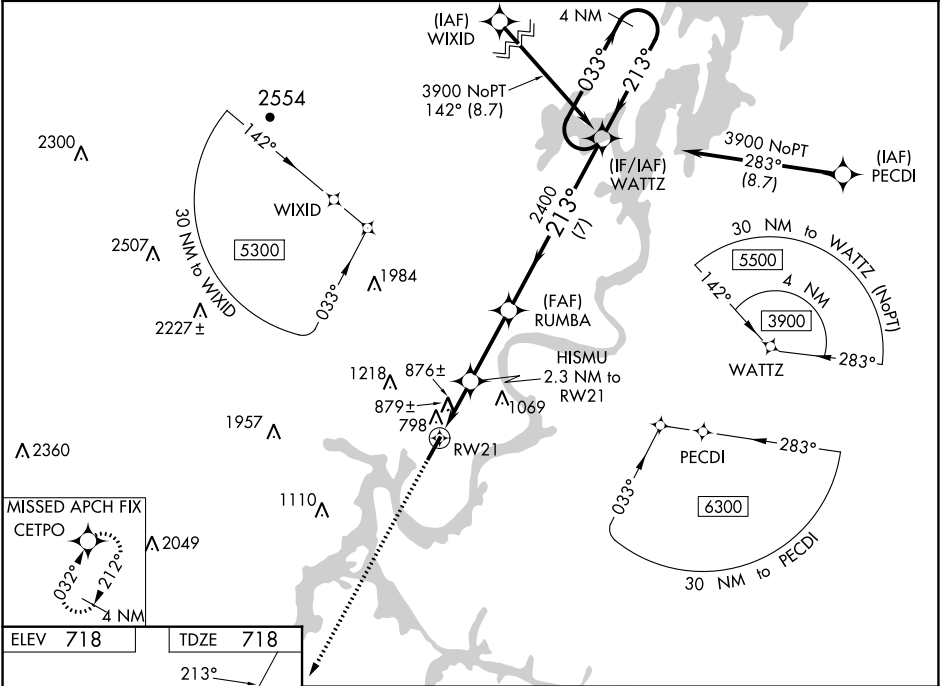

MIRL Rwy 3-21
REIL Rwys 3 and 21

3900 ↑ CETPO ✦		WATTZ 4 NM Holding Pattern 033° → ← 213° 3900		
*LNNAV only. RW21		HISMU 2.3 NM to RW21	RUMBA 2400 *1480 2400	GP 3.00° TCH 31
← 2.3 NM →		← 2.9 NM →		← 7 NM →
CATEGORY	A	B	C	D
LPV DA	1010-1 292 (300-1)			
LNNAV/VNAV DA	1174-1½ 456 (500-1½)			
LNNAV MDA	1140-1 422 (500-1)		1140-1¼ 422 (500-1¼)	
CIRCLING	1380-1 662 (700-1)	1420-1 702 (800-1)	1520-2¼ 802 (900-2¼)	1620-3 902 (1000-3)