

WAAS CH 53316 W35A	APP CRS 351°	Rwy Idg TDZE Apt Elev	5000 5 5
--	------------------------	-----------------------------	-------------------------------------



RNAV (GPS) RWY 35
MARCO ISLAND EXEC (MKY)

PBN APCH.

Baro-VNAV and VDP NA when using Naples altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Naples altimeter setting and increase LPV DA to 312 feet; increase LNAV/VNAV DA to 420 feet; increase all MDAs 40 feet and visibility Cat C 1/4 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct AVCOF and hold, continue climb-in-hold to 3000.

AWOS-3PT 120.075	FORT MYERS APP CON ★ 124.125 371.85	CLNC DEL 120.8	UNICOM 122.7 (CTAF)
----------------------------	---	--------------------------	-------------------------------

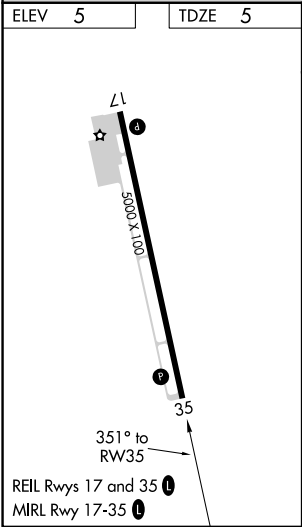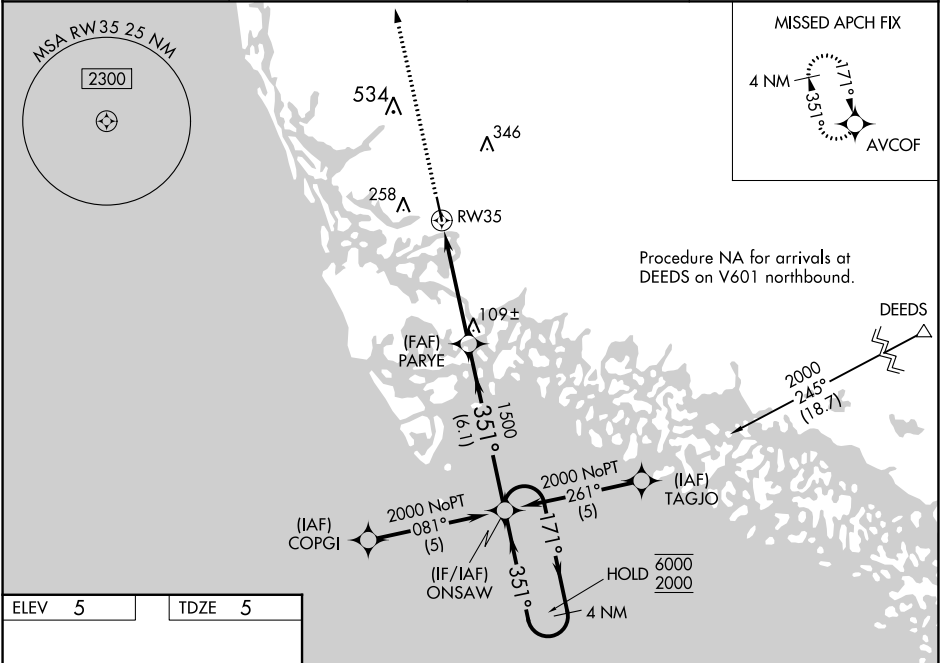

ELEV 5	TDZE 5
3000	AVCOF
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).	
*LNAV only.	
RW35	
PARYE	
ONSAW	
171° → 6000	
← 351° 2000	
GP 3.00°	
TCH 40	
CATEGORY	A B C D
LPV DA	286-1 281 (300-1)
LNAV/VNAV DA	394-1½ 389 (400-1½)
LNAV MDA	520-1 515 (600-1) 520-1½ 515 (600-1½) 520-1¾ 515 (600-1¾)
CIRCLING	620-1 615 (700-1) 660-1¾ 840-2¾ 655 (700-1¾) 835 (900-2¾)

SE-3, 30 NOV 2023 to 28 DEC 2023

SE-3, 30 NOV 2023 to 28 DEC 2023