


APP CRS	Rwy Idg	4000
354°	TDZE	984
	Apf Elev	985

RNAV (GPS) RWY 35

CHANDLER RGNL (CQB)

RNP APCH.	MISSED APPROACH: Climb to 2600 direct CADUT and hold.
▼ ▲ NA When local altimeter setting not received, use Shawnee altimeter setting and increase all MDA 80 feet; increase LNAV Cat C visibility ½ SM. VDP NA with Shawnee Rgnl altimeter setting.	

AWOS-3PT 119.275	KANSAS CITY CENTER 127.8 319.1	CTAF 122.9 0
---------------------	-----------------------------------	-----------------

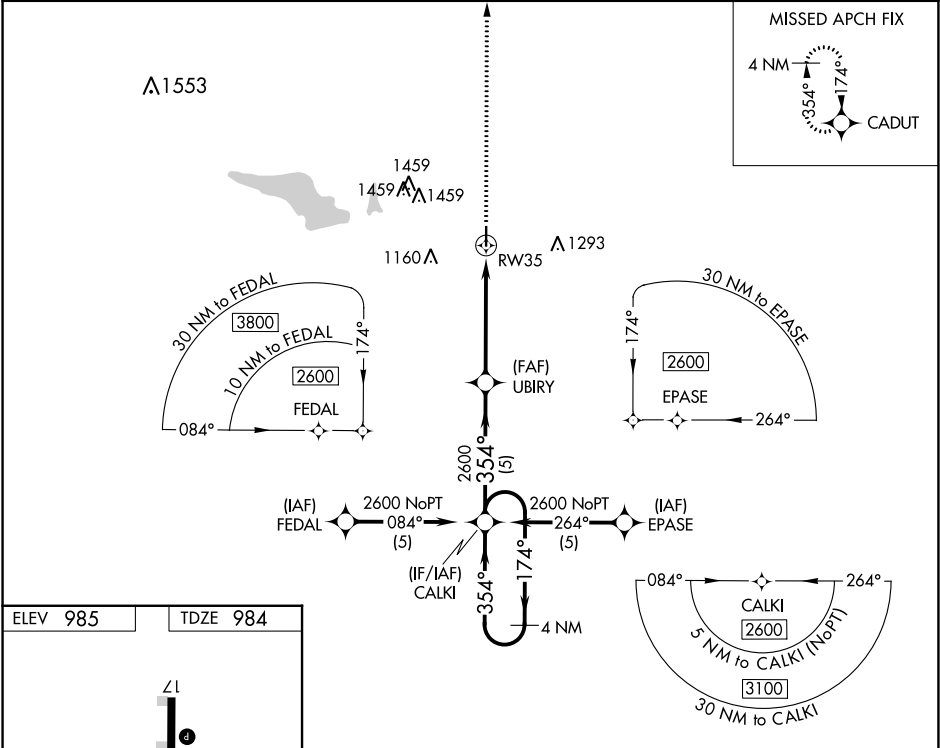

0.6% Up

4000 X 60

35

354°

2600

CADUT

VGSI and descent angles not coincident

(VGSI Angle 3.00/TCH 42).

*LNAV only.

*1.1 NM to RW35

UBIRY

CALKI

4 NM Holding Pattern

2600

GP 3.00° TCH 30

1.1

3.8 NM

5 NM

354°

174°

CATEGORY

GLS PA DA

LNAV/VNAV DA

LNAV MDA

A

B

C

D

NA

NA

1320-1 335 (400-1)

NA

MIRL Rwy 17-35

SC-1, 30 NOV 2023 to 28 DEC 2023

SC-1, 30 NOV 2023 to 28 DEC 2023