


AWOS-3
128.175
CLNC DEL
121.75 254.375
GND CON
121.75 254.375
STANLY COUNTY TOWER ★
126.275 (CTAF) 291.9
CHARLOTTE DEP CON
128.325 307.8

TOP ALTITUDE:
3000

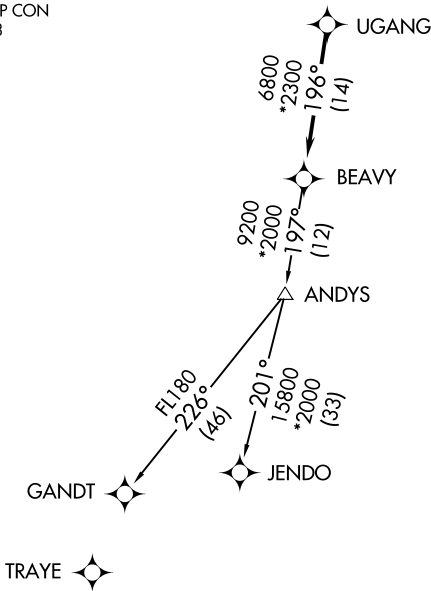

TAKEOFF MINIMUMS
Rwys 4L, 22R: NA
Rwy 22L: Standard.
Rwy 4R: 300-1½ or standard with
minimum climb of 276' per
NM to 1000.

- NOTE: For turbojets only.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: If unable to accept climb rates,
advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to
and maintain 280K, if unable advise ATC.
NOTE: Transponder code will be issued via PDC
or Charlotte CLNC DEL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, expect RADAR vectors to UGANG,
then on track 196° to BEAVY. Then on assigned transition. Maintain
3000, expect clearance to filed altitude within 10 minutes after departure.

GANDT TRANSITION (BEAVY5.GANDT)
JENDO TRANSITION (BEAVY5.JENDO)