


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 5022 |
| 020°    | TDZE     | 3090 |
|         | Apt Elev | 3090 |

RNAV (GPS) RWY 2

MAJOR SAMUEL B CORNELIUS FLD (E42)

|                                                                                                                                                                                                                                                                                                                                                                             |                                      |                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------|
| <div><div>▼</div><div>DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Borger altimeter setting; when not received, use Rick Husband Amarillo Intl altimeter setting and increase all MDA 140 feet, increase LNAV Cat B visibility ¼ mile, LNAV Cat C visibility ½ mile, Circling Cat A visibility ¼ mile, and Circling Cat C visibility ½ mile.</div></div> | <div><div>⚠</div><div>NA</div></div> | <div>MISSED APPROACH: Climbing left turn to 6000 direct OYUSA hold.</div> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------|

|                    |                                      |               |
|--------------------|--------------------------------------|---------------|
| AWOS-3P<br>118.925 | ALBUQUERQUE CENTER<br>127.85 285.475 | CTAF<br>122.9 |
|--------------------|--------------------------------------|---------------|

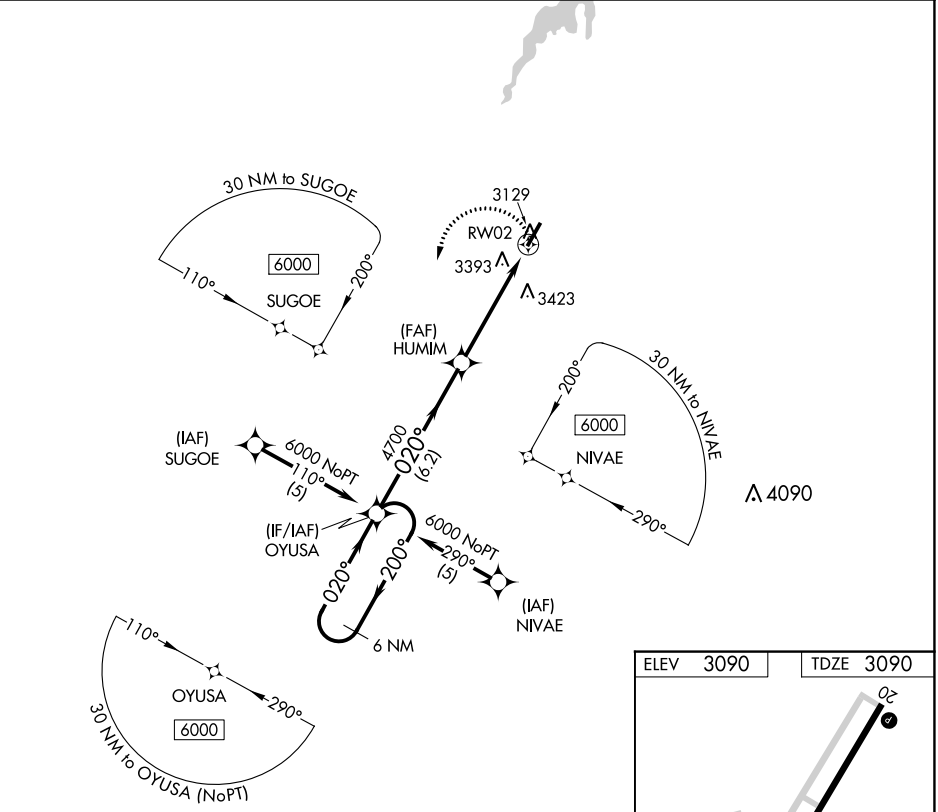

|                      |             |                                                                   |              |        |        |
|----------------------|-------------|-------------------------------------------------------------------|--------------|--------|--------|
| 6 NM Holding Pattern |             | VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 39°). |              | 6000   | OYUSA  |
| 6000                 |             | 200°                                                              |              | 020°   |        |
|                      |             | 020°                                                              |              |        |        |
|                      |             | HUMIM                                                             |              | 3.04°  | TCH 40 |
|                      |             | 4700                                                              |              |        |        |
|                      |             | RW02                                                              |              |        |        |
|                      |             | 6.2 NM                                                            |              | 4.9 NM |        |
| CATEGORY             | A           | B                                                                 | C            | D      |        |
| LNAV MDA             | 3780-1      | 690 (700-1)                                                       | 3780-2       | NA     |        |
|                      |             |                                                                   | 690 (700-2)  |        |        |
| CIRCLING             | 3840-1      | 3840-1¼                                                           | 3840-2¼      | NA     |        |
|                      | 750 (800-1) | 750 (800-1¼)                                                      | 750 (800-2¼) |        |        |

