

APP CRS
051°

Rwy Idg
2500

TDZE
1209

Apt Elev
1209

RNAV (GPS) RWY 4
SEAMANS FLD (9N3)

▼


▲ NA

DME/DME RNP-0.3 NA.
Obtain local altimeter setting on CTAF; when not received,
use Wilkes-Barre/Scranton Intl altimeter setting.
VDP NA when using Wilkes-Barre/Scranton Intl altimeter setting.

MISSED APPROACH: Climbing left
turn to 4000 direct LOPEZ and hold.

WILKES-BARRE APP CON
120.95 256.7

UNICOM
122.7 (CTAF) 0

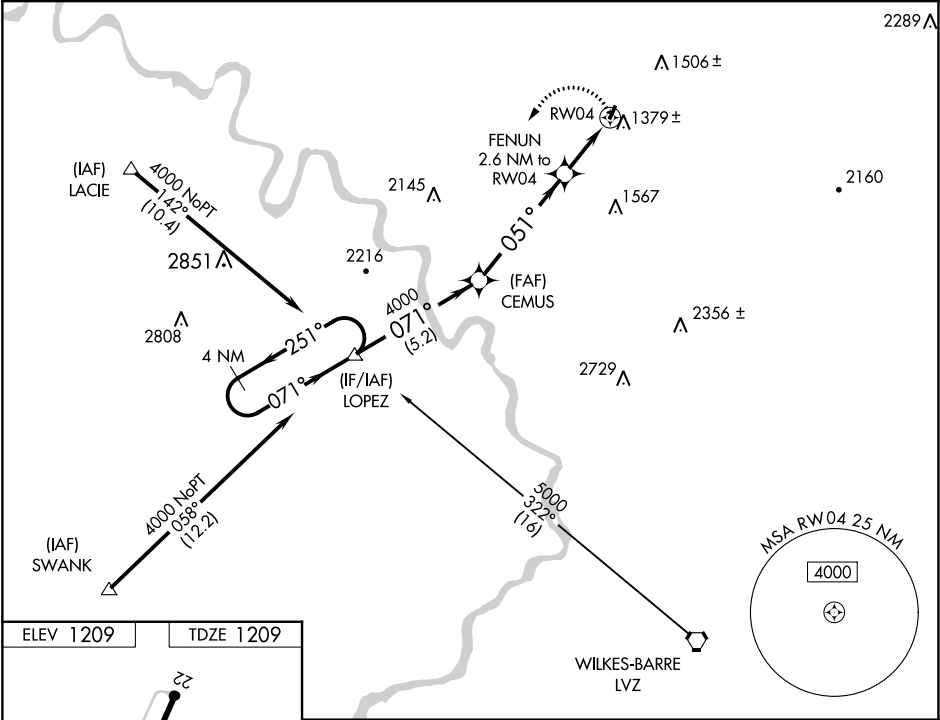

ELEV 1209 TDZE 1209

LRL Rwy 4-22 0

4 NM Holding Pattern

LOPEZ

CEMUS

4000

LOPEZ

4000

251°

071°

071°

4000

051°

FENUN 2.6 NM to RW04

1.1 NM to RW04

RW04

2180

3.49°

TCH 40

5.2 NM

4.9 NM

1.5 NM

1.1

CATEGORY	A	B	C	D
LNAV MDA	1 640-1	431 (500-1)	NA	
CIRCLING	1720-1 511 (600-1)	1780-1 571 (600-1)	NA	
WILKES-BARRE/SCRANTON INTL ALTIMETER SETTING MINIMUMS				
LNAV MDA	1720-1	511 (600-1)	NA	
CIRCLING	1800-1 591 (600-1)	1860-1 651 (700-1)	NA	