


WAAS CH 61140 W35A	APP CRS 354°	Rwy Idg TDZE 1003 Apt Elev 1003
--	------------------------	---

RNAV (GPS) RWY 35
PERRY MUNI (F22)

NA

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Ponca City altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet and all visibility ¼ SM, increase all MDAs 60 feet and Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct AHOBY and hold.

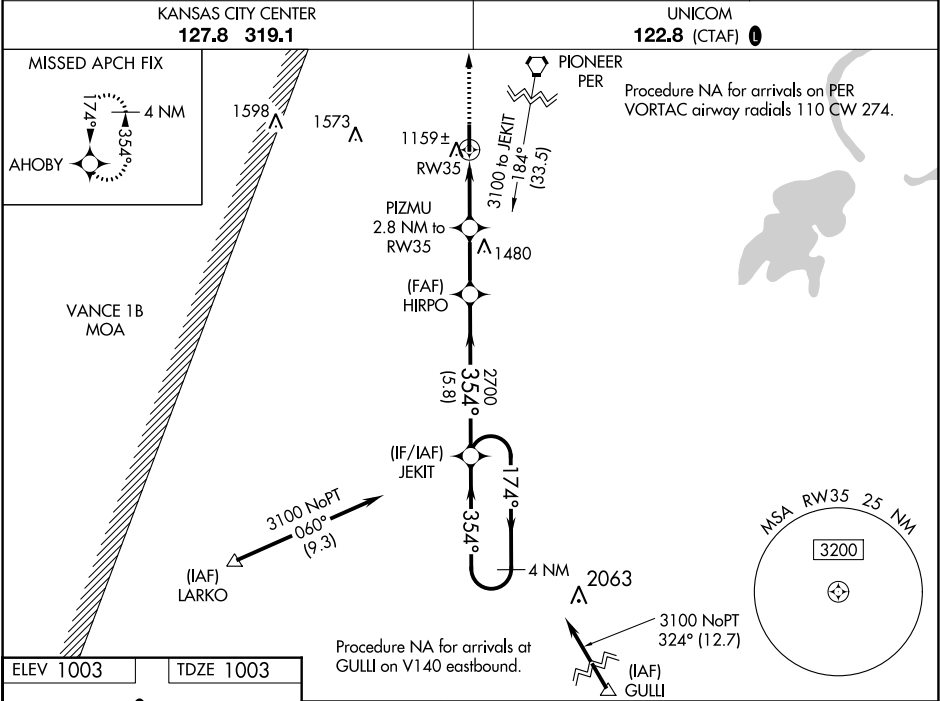

ELEV 1003 **TDZE 1003**

MIRL Rwy 17-35 **REIL Rwy 17 and 35**

35 **354°**

3000 **AHOBY**

*** LNAV only**

PIZMU 2.8 NM to RW35 **HIRPO** 2700 **JETIT** 3100

*** 1.2 NM to RW35** **1940*** **354°** **174°** **3100**

1.2 **1.6** **2.4 NM** **5.8 NM**

GP 3.00° TCH 46

CATEGORY	A	B	C	D
LPV DA	1253-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1330-1⅛ 327 (400-1⅛)			NA
LNAV MDA	1420-1	417 (500-1)	1420-1⅛ 417 (500-1⅛)	NA
CIRCLING	1480-1	477 (500-1)	1620-1¾ 617 (700-1¾)	NA

SC-1, 30 NOV 2023 to 28 DEC 2023

SC-1, 30 NOV 2023 to 28 DEC 2023