


|                |             |                      |
|----------------|-------------|----------------------|
| VORTAC PER     | APP CRS     | Rwy Idg              |
| <b>113.2</b>   | <b>189°</b> | <b>5103</b>          |
| Chan <b>79</b> |             | <b>994</b>           |
|                |             | Apt Elev <b>1003</b> |

VOR RWY 17  
PERRY MUNI (F22)

Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting. DME required.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct PER VORTAC and hold.

|                                          |                                 |
|------------------------------------------|---------------------------------|
| KANSAS CITY CENTER<br><b>127.8 319.1</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------------------------|---------------------------------|

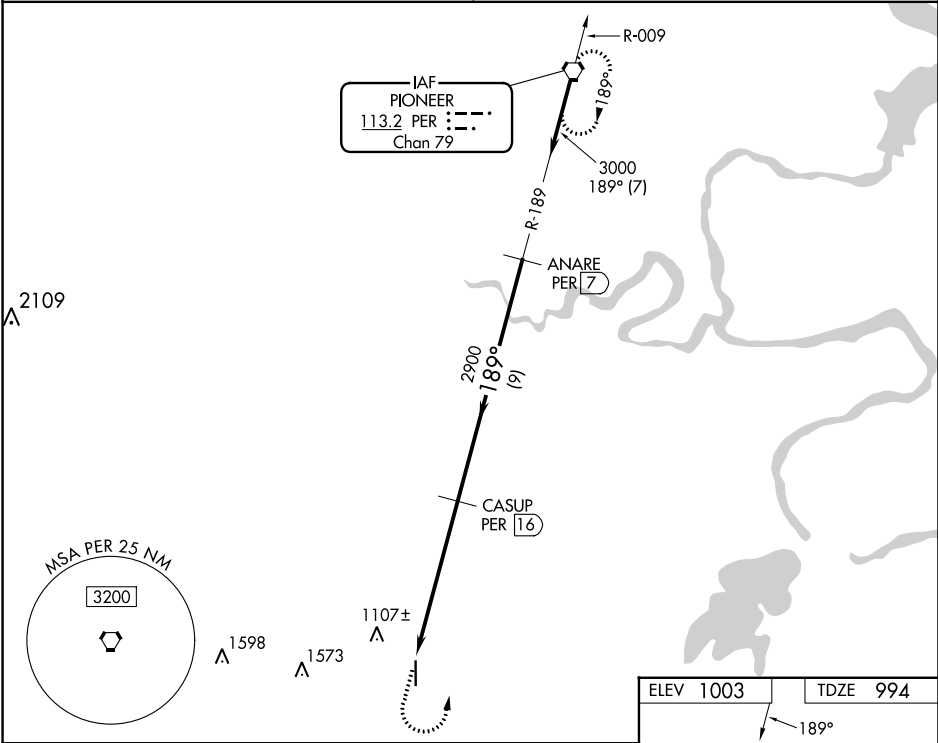

|                                                                           |                       |                         |                         |    |
|---------------------------------------------------------------------------|-----------------------|-------------------------|-------------------------|----|
| <div><div>2000</div><div>3000</div><div>PER</div></div>                   |                       |                         |                         |    |
| <div><div>PER 22</div><div>CASUP PER 16</div><div>ANARE PER 7</div></div> |                       |                         |                         |    |
| <div>Procedure Turn NA</div>                                              |                       |                         |                         |    |
| CATEGORY                                                                  | A                     | B                       | C                       | D  |
| S-17                                                                      | 1500-1<br>506 (500-1) | 1500-1¼<br>506 (500-1¼) | 1500-1½<br>506 (500-1½) | NA |
| CIRCLING                                                                  | 1500-1<br>497 (500-1) | 1500-1¼<br>497 (500-1¼) | 1620-1¾<br>617 (700-1¾) | NA |
| PONCA CITY ALTIMETER SETTING MINIMUMS                                     |                       |                         |                         |    |
| S-17                                                                      | 1560-1<br>566 (600-1) | 1560-1¼<br>566 (600-1¼) | 1560-1½<br>566 (600-1½) | NA |
| CIRCLING                                                                  | 1560-1<br>557 (600-1) | 1560-1¼<br>557 (600-1¼) | 1680-2<br>677 (700-2)   | NA |

