

WAAS CH 78408 W05A	APP CRS 053°	Rwy Idg 5500 TDZE 878 Apt Elev 878
--	------------------------	---

RNAV (GPS) RWY 5

LINCOLN-LINCOLN COUNTY RGNL (IPJ)

RNP APCH.

T When local altimeter setting not received, use Charlotte altimeter setting: increase LPV DA to 1395 feet, LNAV/VNAV DA to 1463 feet and visibility LNAV/VNAV $\frac{1}{4}$ SM; increase all MDAs 80 feet and visibility Cats C and D $\frac{1}{4}$ SM. Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV and VDP NA when using Charlotte altimeter setting.

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C.


MISSED APPROACH: Climb to 3000 direct JIVOM and hold.

AWOS-3
119.675

CHARLOTTE APP CON
134.75 257.2

CLNC DEL (GCO)
124.9

UNICOM
123.05 (CTAF) 

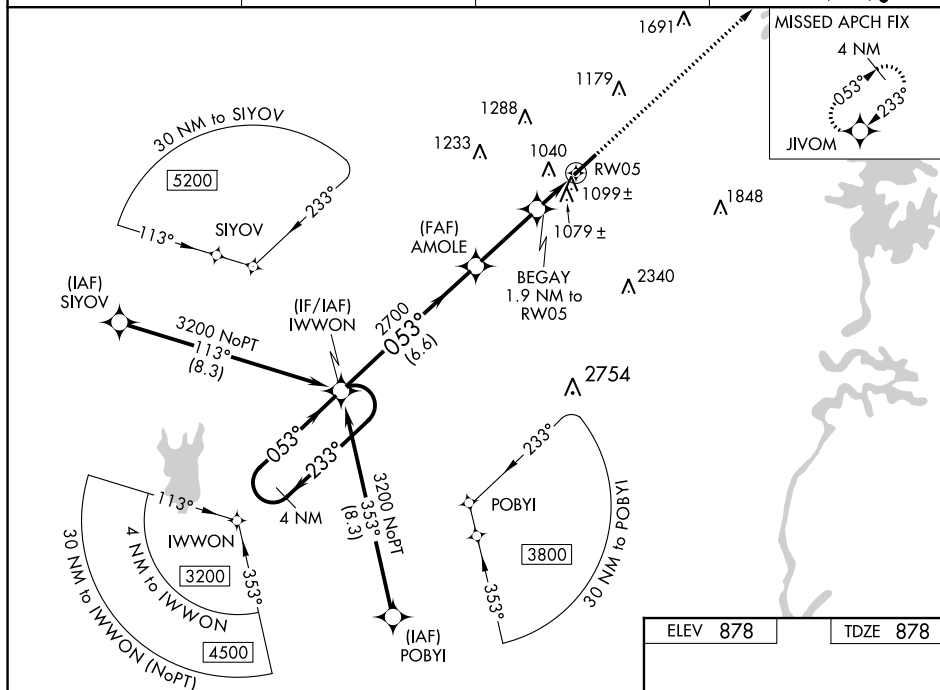

SE-2, 30 NOV 2023 to 28 DEC 2023

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.40/TCH 64).

3000 JIVOM

3200 ← 233° 053° →

GP 3.40° TCH 58

IWWON

AMOLE

BEGAY 1.9 NM to RW05

2700

2700

*1620

*1.2 NM to RW05


RW05

*LNAV only.

4.6 NM 3 NM 0.7 NM 1.2 NM

CATEGORY	A	B	C	D
LPV DA	1332-1 $\frac{3}{8}$	454 (500-1 $\frac{3}{8}$)		NA
LNAV/ VNAV DA	1400-1 $\frac{1}{2}$	522 (600-1 $\frac{1}{2}$)		NA
LNAV MDA	1360-1	482 (500-1)	1360-1 $\frac{3}{8}$	482 (500-1 $\frac{3}{8}$)
C CIRCLING	1400-1 522 (600-1)	1440-1 562 (600-1)	1640-2 $\frac{1}{4}$ 762 (800-2 $\frac{1}{4}$)	1640-2 $\frac{1}{2}$ 762 (800-2 $\frac{1}{2}$)

ELEV 878		TDZE 878
----------	--	----------

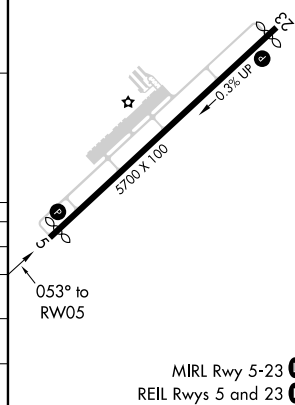

LINCOLNTON, NORTH CAROLINA
Amdt 1D 10SEP20

35°29'N-81°10'W

LINCOLN-LINCOLN COUNTY RGNL (IPJ)
0°W RNAV (GPS) RWY 5MIRL Rwy 5-23

REIL Rwy 5 and 23 ●