

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>62825</b><br><b>W23A</b> | APP CRS<br><b>227°</b> | Rwy Idg<br>TDZE <b>352</b><br>Apt Elev <b>368</b> |
|----------------------------------------|------------------------|---------------------------------------------------|


RNAV (GPS) RWY 23

TRIANGLE NORTH EXEC (LHZ)

**⚠** Baro-VNAV NA when using Raleigh-Durham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). When VGSi inop, Straight-in/Circling Rwy 23 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Raleigh-Durham altimeter setting and increase LPV DA to 667 feet; LNAV/VNAV DA to 684 feet and all visibilities ½ SM. Increase all MDAs 80 feet and visibility Cats C/D ¾ SM.

**MISSED APPROACH:** Climb to 3300 direct ERUYO and on track 198° to ZEBUL and hold, continue climb-in-hold to 3300.

|                          |                                         |                                 |
|--------------------------|-----------------------------------------|---------------------------------|
| AWOS-3<br><b>118.325</b> | RALEIGH APP CON<br><b>125.3 353.675</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|-----------------------------------------|---------------------------------|

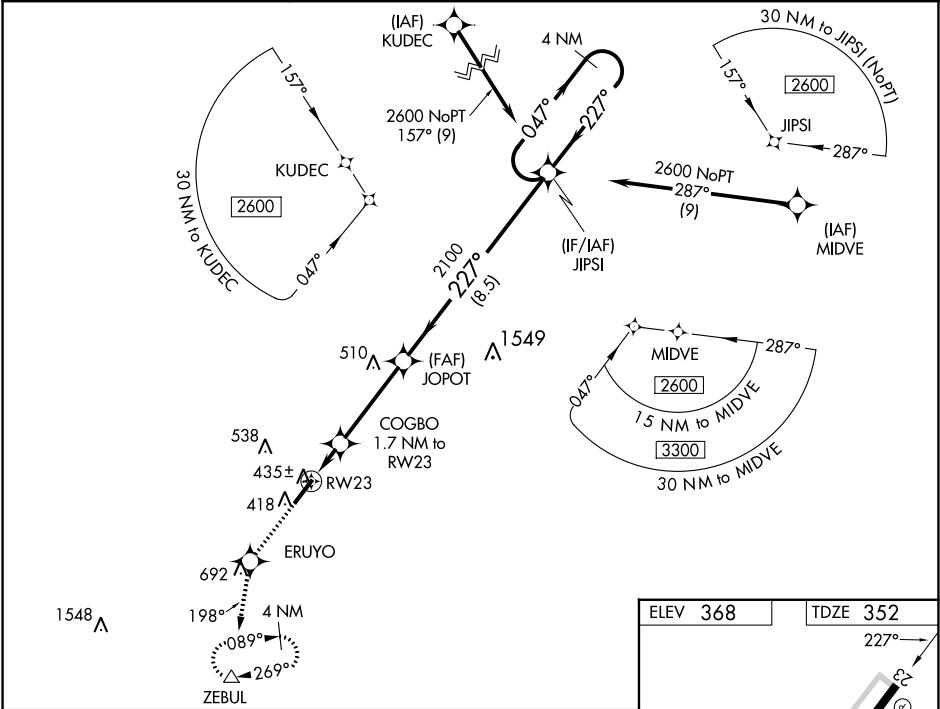

|                           |       |                      |                      |                        |                       |
|---------------------------|-------|----------------------|----------------------|------------------------|-----------------------|
| 3300                      | ERUYO | ZEBUL                |                      |                        |                       |
| ↑                         | 198°  | △                    |                      |                        |                       |
| * LNAV only               |       |                      |                      |                        |                       |
| COGBO<br>1.7 NM to RW23   |       |                      |                      |                        |                       |
| RW23                      |       |                      |                      |                        |                       |
| 900*                      |       |                      |                      |                        |                       |
| 1.7 NM 3.7 NM 8.5 NM      |       |                      |                      |                        |                       |
| JOPOT 2100                |       |                      |                      |                        |                       |
| JPSI 4 NM Holding Pattern |       |                      |                      |                        |                       |
| 047° → 2600               |       |                      |                      |                        |                       |
| ← 227°                    |       |                      |                      |                        |                       |
| 2100                      |       |                      |                      |                        |                       |
| GP 3.00°<br>TCH 46        |       |                      |                      |                        |                       |
| CATEGORY                  |       | A                    | B                    | C                      | D                     |
| LPV                       | DA    | 602-1 250 (300-1)    |                      |                        |                       |
| LNAV/<br>VNAV             | DA    | 619-1 267 (300-1)    |                      |                        |                       |
| LNAV                      | MDA   | 700-1 348 (400-1)    |                      |                        |                       |
| CIRCLING                  |       | 800-1<br>432 (500-1) | 840-1<br>472 (500-1) | 980-1¾<br>612 (700-1¾) | 1000-2<br>632 (700-2) |

