



CONCORD, NORTH CAROLINA

TOP ALTITUDE:
3000

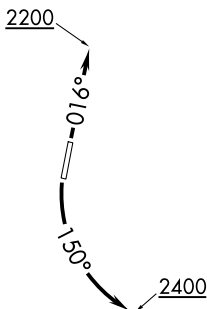

Rwy 2: Standard.
Rwy 20: Standard with minimum climb
of 320' per NM to 2400.

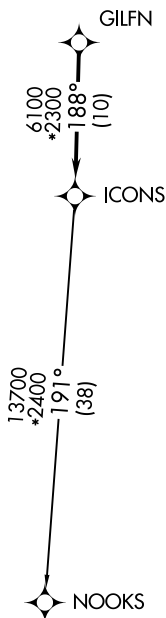

- NOTE: For turbojets only.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: If unable to accept climb rates,
advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL,
accelerate to and maintain 280K,
if unable advise ATC.
NOTE: Transponder code will be issued
via PDC or Charlotte CLNC DEL

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 2: Climb heading 016° to 2200, thence. . .
TAKEOFF RWY 20: Climbing left turn heading 150° to 2400, thence. . .

. . . on heading as assigned by ATC, expect RADAR vectors to GILFN, then on track 188° to ICONS. Then on NOOKS transition. Maintain 3000, expect filed altitude within 10 minutes after departure.

NOOKS TRANSITION (ICONS4.NOOKS)