

WEAZL FOUR DEPARTURE (RNAV)

CONCORD-PADGETT RGNL (JQF)
CONCORD, NORTH CAROLINATOP ALTITUDE:
3000ATIS★
133.675
CLNC DEL
118.55

CLNC DEL (when twr closed)

127.25

GND CON

121.85

CONCORD TOWER★


134.65 (CTAF)

UNICOM

122.95

CHARLOTTE DEP CON

128.325 307.8

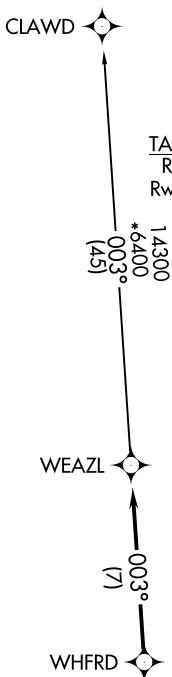


TAKEOFF MINIMUMS

Rwy 2: Standard.

Rwy 20: Standard with minimum climb of 320' per NM to 2400.

NOTE: For turbojets only.
 NOTE: DME/DME/IRU or GPS required.
 NOTE: RNAV 1.
 NOTE: RADAR required.
 NOTE: If unable to accept climb rates, advise ATC on initial contact.
 NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 2: Climb heading 016° to 2200, thence...

TAKEOFF RWY 20: Climbing left turn heading 150° to 2400, thence. . . .

. . . . on heading assigned by ATC, expect RADAR vectors to WHFRD, then on track 003° to WEAZL, then on CLAWD transition. Maintain 3000, expect clearance to filed altitude within 10 minutes after departure.

CLAWD TRANSITION (WEAZL4.CLAWD)