

WAAS CH 78217 W31A	APP CRS 307°	Rwy Idg 3700 TDZE 1675 Apt Elev 1681
--	------------------------	---



RNAV (GPS) RWY 31

BOTTINEAU MUNI (D09)


T Baro-VNAV NA. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Minot Air Force Base altimeter setting, when not received; use Devils Lake altimeter setting and increase all DA/MDA 100 feet. Increase LPV, LNAV/VNAV Cats A/B and Circling Cat B visibility ¼ mile.

MISSED APPROACH: Climb to 3900 direct CUSKI and left turn on track 217° to WUTUT and left turn on track 127° to ZONWY and hold.

AWOS-3PT 118.25	MINOT APP CON ★ 119.6 363.8	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

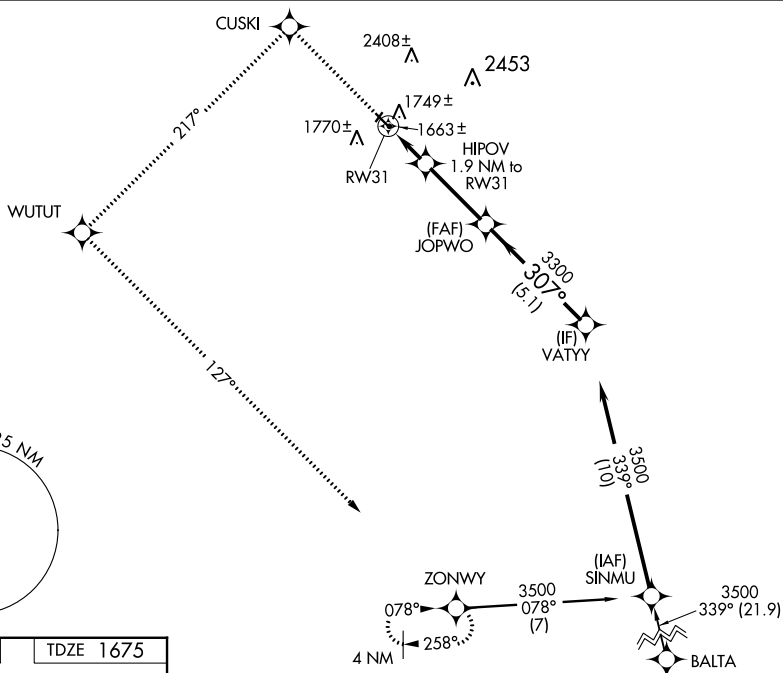

ELEV 1681		TDZE 1675
-----------	--	-----------

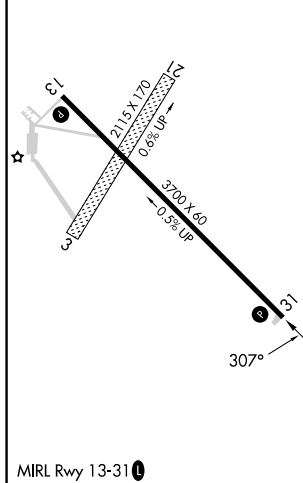

3900 ↑	CUSKI ✦	tr 217°	WUTUT ✦	tr 127°	ZONWY ✦	Procedure Turn NA
						VATYY
VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 30). *RNAV only						
HIPOV 1.9 NM to RW31 3300 307° 3500 GP 3.00° TCH 40 2300* 3300 1.9 NM 3.1 NM 5.1 NM						
CATEGORY	A		B		C	D
LPV DA	2051-1½		376 (400-1½)		NA	
RNAV/DA	2125-1¾		450 (500-1¾)		NA	
RNAV MDA	2120-1		445 (500-1)		NA	
CIRCLING	2360-1 679 (700-1)		2560-1¼ 879 (900-1¼)		NA	