



|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>58134</b><br><b>W01A</b> | APP CRS<br><b>011°</b> | Rwy Idg <b>4412</b><br>TDZE <b>221</b><br>Apt Elev <b>221</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 1  
PANOLA COUNTY (PMU)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 46°C (115°F).  
DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using University-Oxford altimeter setting.  
When local altimeter setting not received, use Oxford altimeter setting and increase LPV DA to 688, LNAV/VNAV DA to 729 and MDA 80 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, LNAV Cats C, D visibility ½ mile, and Circling Cats B, C visibility ¼ mile.  
Helicopter visibility reduction below ¾ SM NA.

**MISSED APPROACH:**  
Climb to 900 then climbing right turn to 2800 direct HEDAX and hold.

|                            |                                       |                                 |
|----------------------------|---------------------------------------|---------------------------------|
| AWOS-3PT<br><b>118.225</b> | MEMPHIS CENTER<br><b>128.5 279.55</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|---------------------------------------|---------------------------------|

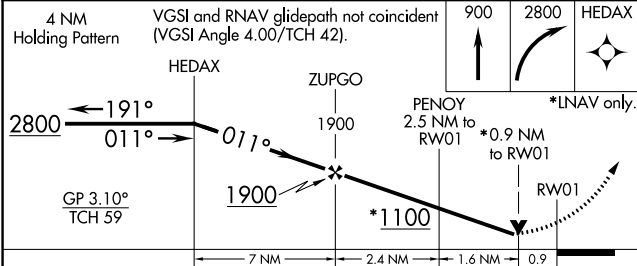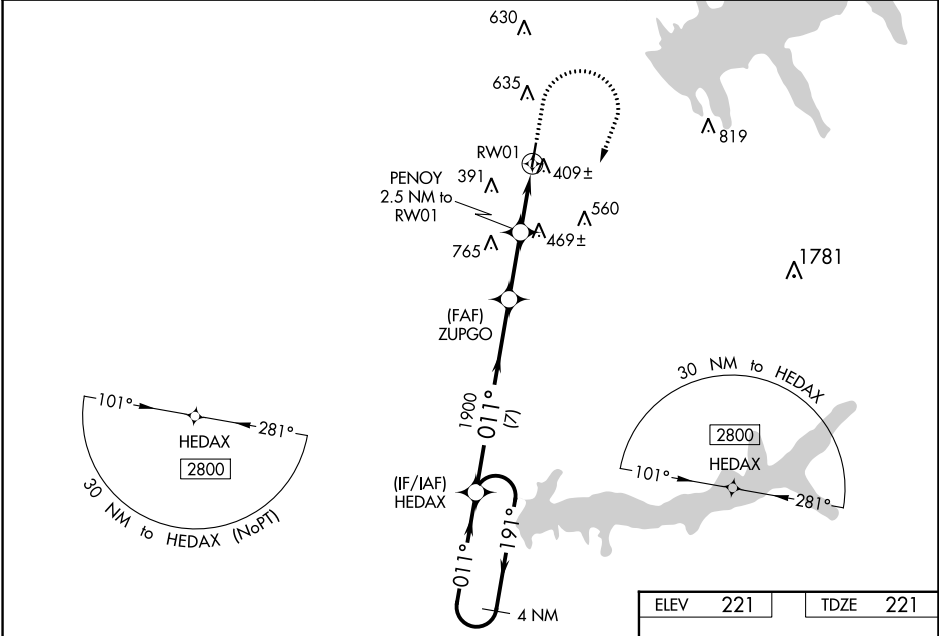

| CATEGORY     | A                    | B                     | C                       | D                     |
|--------------|----------------------|-----------------------|-------------------------|-----------------------|
| LPV DA       | 614-1¼               |                       | 393 (400-1¼)            |                       |
| LNAV/VNAV DA | 661-1⅜               |                       | 440 (500-1⅜)            |                       |
| LNAV MDA     | 660-1                | 439 (500-1)           | 660-1¼                  | 439 (500-1¼)          |
| CIRCLING     | 740-1<br>519 (600-1) | 1000-1<br>779 (800-1) | 1000-2¼<br>779 (800-2¼) | 1120-3<br>899 (900-3) |

