

WAAS

CH **57940**

W35A

APP CRS

351°

Rwy Idg

5943

TDZE

675

Apt Elev

693

RNAV (GPS) RWY 35

KENNETH COPELAND (4T2)

RNP APCH.

⚠

⚠NA

Baro-VNAV and VDP NA when using Fort Worth Meacham Intl altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Obtain local altimeter setting on CTAF; when not received, use Fort Worth Meacham Intl altimeter setting: Increase LPV DA to 955 feet; increase LNAV/VNAV DA to 1144 feet; increase all MDA 40 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH:

Climb to 3100 direct ODGOY and hold.


REGIONAL APP CON

125.8 257.95

UNICOM

123.075 (CTAF)

0

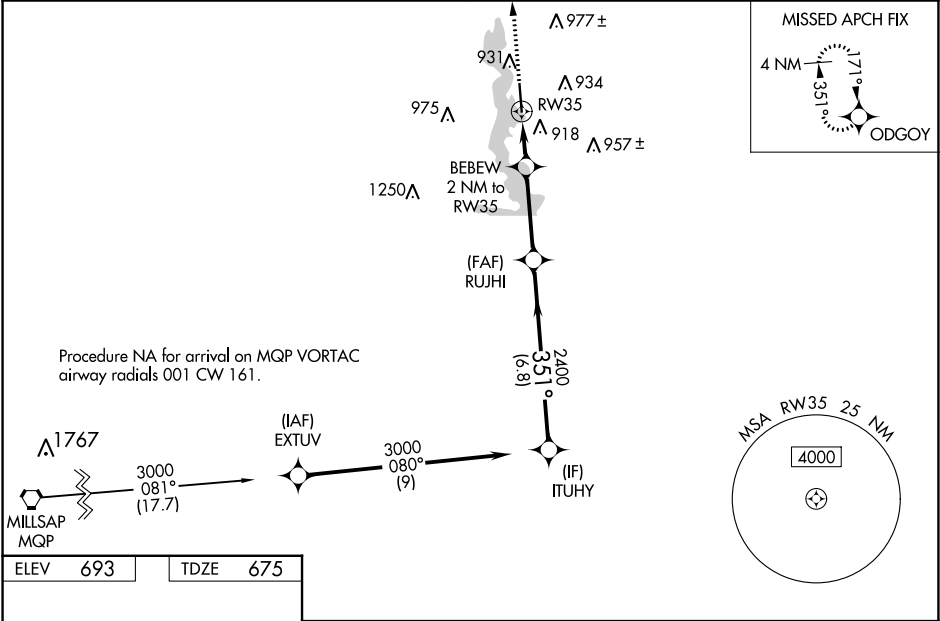

ELEV 693

TDZE 675

3100

ODGOY

*LNAV only.

ITUHY

3000

351°

GP 3.00°

TCH 40

RW35

1320*

BEBEW

2 NM to RW35

RUJHI

2400

1.5 NM

0.5 NM

3.3 NM

6.8 NM

CATEGORY	A	B	C	D
LPV DA	925-1 250 (300-1)			
LNAV/VNAV DA	1114-1½ 439 (500-1½)			
LNAV MDA	1180-1 505 (500-1)	1180-1¾ 505 (500-1¾)		
CIRCLING	1240-1 547 (600-1)	1340-1¾ 647 (700-1¾)	1440-2½ 747 (800-2½)	