

WAAS CH 86619 W28B	APP CRS 281°	Rwy Idg TDZE Apt Elev	8000 813 815
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 28R
JOHN GLENN COLUMBUS INTL (CMH)

RNP APCH.

▼ Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. LNAV procedure NA during simultaneous operations.


▲ Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility or RVR 4500; increase LNAV Cat C/D visibility to 1 3/8 SM. **●** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH:
Climb to 1400 then
climbing right turn to
3000 direct APE
VORTAC and hold.

D-ATIS 124.6	COLUMBUS APP CON 125.95 371.975	COLUMBUS TOWER 132.7 257.8	GND CON 121.9 348.6	CLNC DEL 126.3	CPDLC
-----------------	------------------------------------	-------------------------------	------------------------	-------------------	-------

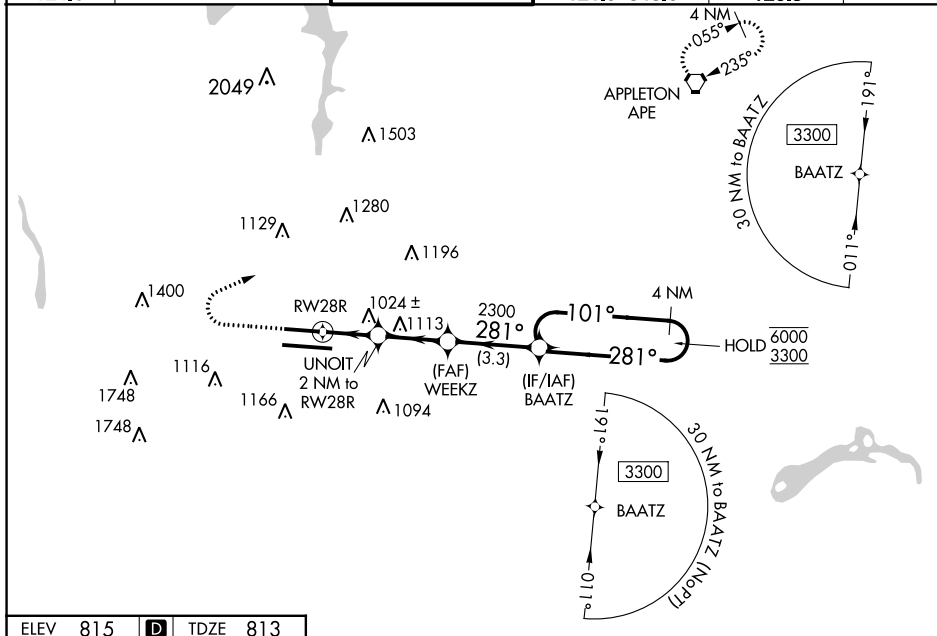

ELEV 815	D	TDZE 813
----------	----------	----------

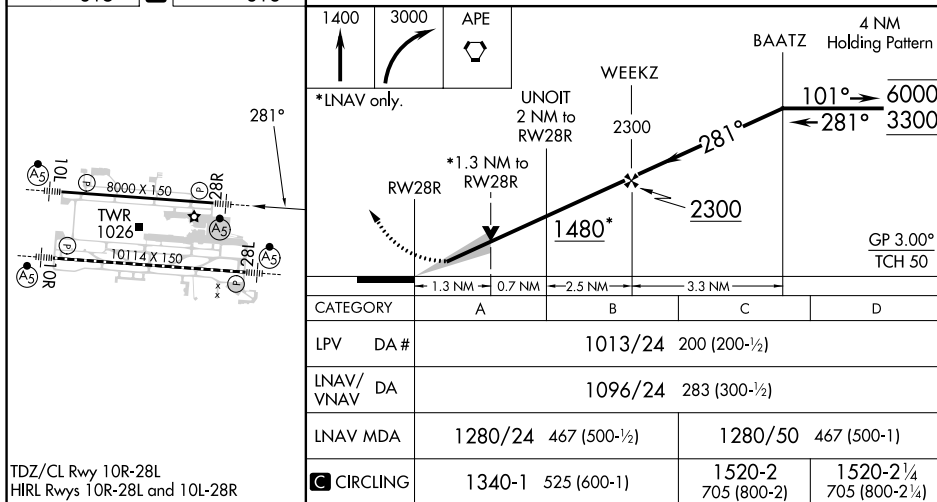

COLUMBUS, OHIO

Amdt 3 22APR21

JOHN GLENN COLUMBUS INTL (CMH)

40°00'N-82°54'W

RNAV (GPS) Y RWY 28R