

WAAS CH 70709 W35D	APP CRS 350°	Rwy Idg TDZE 480 Apt Elev 501
--	------------------------	---

RNAV (GPS) Y RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH.



Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.

ALS F-2

MISSED APPROACH:

Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

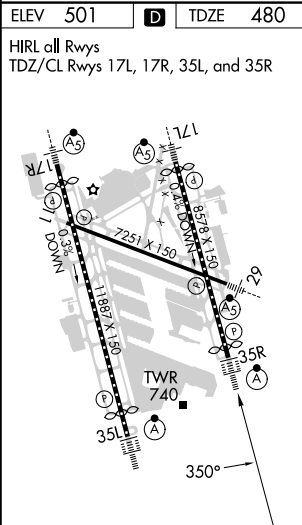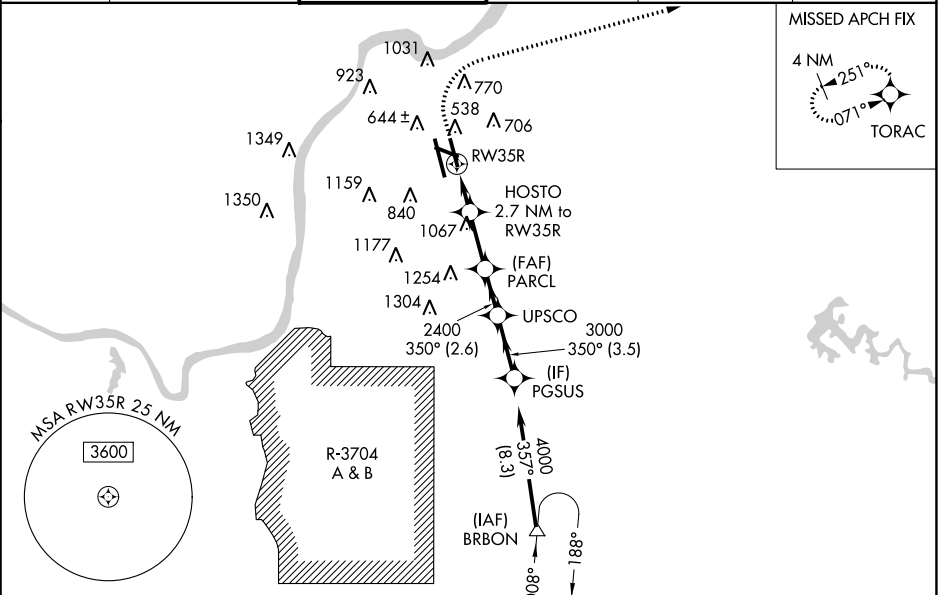

ELEV 501	D	TDZE 480
HIRL all Rwy TDZ/CL Rwy 17L, 17R, 35L, and 35R		
Arrival holding not required at BRBON on V5-513 northbound.		
*LNAV only.		
*1.4 NM to RWY35R		
*2.7 NM to RWY35R		
*1360		
*2400		
*3500		
*4000		
*GP 3.00° TCH 60		
CATEGORY	A	B
LPV DA	680/18	200 (200-½)
LNAV/VNAV DA	909/50	429 (500-1)
LNAV MDA	1000/24	520 (500-½)
CIRCLING	1040-1	1140-1
	539 (600-1)	639 (700-1)
	1160-1¾	1400-3
	659 (700-1¾)	899 (900-3)